Nuclear Byproduct Material Risk Review: Results of Survey of NRC and Agreement State Materials Licensing and Inspection Personnel

Final Report

Manuscript Completed: February 2000 Date Published: March 2000

Prepared by D. Serig, J. Lubinski, E. Ullrich, J. Randall, N. Daugherty*

*State of Colorado, Department of Public Health and Environment

Division of Industrial and Medical Nuclear Safety Office of Nuclear Material Safety and Safeguards U.S. Nuclear Regulatory Commission Washington, DC 20555-0001

ABSTRACT

This project responded to NRC's Direction Setting Issue 12, Risk-Informed, Performance-Based Regulation. Its scope was limited to nuclear byproduct materials as defined in Section 11.e(1) of the Atomic Energy Act of 1954 and Title 10 of the Code of Federal Regulations (CFR), Section 30.4. 10 CFR Parts 30 through 36 and 39 address regulation of those materials. The goal was to confirm and augment information on nuclear byproduct material systems obtained from other sources. The process involved (1) use of a list of nuclear byproduct material systems based on how the nuclear byproduct material was used, (2) a survey of NRC and Agreement State materials licensing and inspection personnel concerning typical annual doses to workers for the various systems, safety of each system under various conditions, the types and frequencies of incidents occurring at each system, definitions of safety, and opinions about the appropriate bases for regulatory decision making, and (3) summarization of the respondent's answers to those questions.

ABS	ABSTRACTiii		
1		PONSES TO QUESTIONS ABOUT ANNUAL WORKER DOSES, SAFETY UNDER IOUS CONDITIONS, AND EVENTS THAT OCCUR BY SYSTEM	-1
	1.1	SYSTEM 1: RESEARCH AND DEVELOPMENT SYNTHESIS LABORATORIES 1-	2
	1.2	SYSTEM 2: RESEARCH AND DEVELOPMENT LABORATORIES USING CARBON,	
		HYDROGEN, IODINE, PHOSPHOROUS, AND SULFUR 1-	3
	1.3	SYSTEM 3: IN VITRO TESTING 1-	4
	1.4	SYSTEM 4: 10 CFR 35.100 — NUCLEAR MEDICINE AND HUMAN USE RESEARCH 1-	-5
	1.5	SYSTEM 5: 10 CFR 35.200 — NUCLEAR MEDICINE WITH GENERATOR(S) 1-	6
	1.6	SYSTEM 6: 10 CFR 35.200 — NUCLEAR MEDICINE WITHOUT A GENERATOR 1-	7
	1.7	SYSTEM 7: 10 CFR 35.300 — NUCLEAR MEDICINE 1-	8
	1.8	SYSTEM 8: BRACHYTHERAPY — USING SEEDS 1-	.9
	1.9	SYSTEM 9: BRACHYTHERAPY — MANUAL AFTERLOADING 1-1	0
	1.10	SYSTEM 10: BRACHYTHERAPY — LOW DOSE RATE REMOTE AFTERLOADING 1-1	1
	1.11	SYSTEM 11: BRACHYTHERAPY — HIGH DOSE RATE REMOTE AFTERLOADING 1-1	3
	1.12	SYSTEM 12: BRACHYTHERAPY — EYE APPLICATOR 1-1	4
	1.13	SYSTEM 13: 10 CFR 35.400 — DIAGNOSTIC DEVICES 1-1	5
	1.15	SYSTEM 14: TELETHERAPY DEVICES 1-1	7
	1.16	SYSTEM 15: GAMMA STEREOTACTIC SURGERY 1-1	8
	1.17	SYSTEM 16: NUCLEAR PHARMACIES 1-1	9
	1.18	SYSTEM 17: VETERINARY USE 1-2	
	1.19	SYSTEM 18: RESEARCH AND DEVELOPMENT ON ANIMALS	,1
	1.20	SYSTEM 19: WELL-LOGGING — TRACERS AND FIELD FLOOD STUDIES 1-2	2
	1.21	SYSTEM 20: WELL LOGGING — USING SEALED SOURCES 1-2	3
	1.22	SYSTEM 21: RADIOGRAPHY — PERMANENT INSTALLATION	4
	1.23	SYSTEM 22: RADIOGRAPHY — FIELD USE 1-2	5
	1.24	SYSTEM 23: POOL IRRADIATORS 1-2	7
	1.25	SYSTEM 24: SELF-SHIELDED IRRADIATORS 1-2	
	1.26	SYSTEM 25: FIXED GAUGES — GAMMA EMITTERS 1-2	9
	1.27	SYSTEM 26: FIXED GAUGES — BETA EMITTERS 1-3	0
	1.28	SYSTEM 27: PORTABLE GAUGES 1-3	1
	1.29	SYSTEM 28: X-RAY FLUORESCENCE DEVICES	2
	1.30	SYSTEM 29: GAS CHROMATOGRAPHS 1-3	3
	1.31	SYSTEM 30: OTHER MEASURING SYSTEMS 1-3	
	1.32	SYSTEM 31: SMALL SEALED SOURCES OR DEVICES	
	1.33	SYSTEM 32: VERY SMALL SEALED SOURCES OR DEVICES 1-3	6
	1.34	SYSTEM 33: MANUFACTURING OR DISTRIBUTION OF DEVICES CONTAINING	_
	1.0-	SEALED SOURCES	
	1.35	SYSTEM 34: MANUFACTURING OF RADIOACTIVE SOLIDS	-
	1.36	SYSTEM 35: MANUFACTURING OF SOURCES CONTAINING LIQUIDS	
	1.37	SYSTEM 36: MANUFACTURING OF SOURCES CONTAINING GASES	
	1.38	SYSTEM 37: INCINERATION OF WASTE	1

	1.39	SYSTEM 38: COMPACTING OF WASTE	1-42
	1.40	SYSTEM 39: PACKAGING OF WASTE	1-43
	1.41	SYSTEM 40: SOLIDIFICATION OF WASTE	1-44
	1.42	SYSTEM 41A: NUCLEAR LAUNDRIES	1-46
	1.43	SYSTEM 41B: DECONTAMINATION SERVICES	1-46
2	RAN	K ORDERING OF NUCLEAR BYPRODUCT MATERIAL SYSTEMS	2-1
3	RESI	PONDENTS DEFINITIONS OF "SAFE" ETC	3-1
4	RESI	PONSES TO QUESTIONS ABOUT REGULATORY DECISION-MAKING	4-1

APPENDICES

А	Questionnaire	A-1
В	Correspondence Related to the Questionnaire	B-1
С	Responses to Comments on Draft NUREG-1712	C-1

TABLES

Modal Selections on Questions Related to the Safety of Research and Development Synthesis Laboratories Under Various Conditions(Ns =30 to 34)	1-2
Median Selections on Questions Related to the Safety of Research and Development Synthesis Laboratories Under Various Conditions (Ns = 30 to 34)	1-2
Modal Selections on Questions Related to the Safety of Research and Development Laboratories Using Carbon, Hydrogen, Iodine, Phosphorous, and Sulfur Under Various Conditions (Ns = 37 to 39)	1-3
Median Selections on Questions Related to the Safety of Research and Development Laboratories Using Carbon, Hydrogen, Iodine, Phosphorous, and Sulfur Under Various Conditions (Ns = 37 to 39)	1-3
Modal Selections on Questions Related to the Safety of In Vitro Testing Under Various Conditions (Ns = 37 to 39)	1-4
Median Selections on Questions Related to the Safety of In Vitro Testing Under Various Conditions (Ns = 37 to 39)	1-4
Modal Selections on Questions Related to the Safety of 10 CFR 35.100 - Nuclear Medicine and Human Use Research Under Various Conditions (Ns = 35 to 38)	1-5
Median Selections on Questions Related to the Safety of 10 CFR 35.100 - Nuclear Medicine and Human Use Research Under Various Conditions (Ns = 35 to 38)	1-5
Modal Selections on Questions Related to the Safety of 10 CFR 35.200 — Nuclear Medicine with Generator(s) Under Various Conditions (Ns = 36 to 38)	1-6
Median Selections on Questions Related to the Safety of 10 CFR 35.200 — Nuclear Medicine with Generator(s) Under Various Conditions (Ns = 36 to 38)	1-6
Modal Selections on Questions Related to the Safety of 10 CFR 35.200 — Nuclear Medicine Without a Generator Under Various Conditions (Ns = 35 to 38)	1-7
	Laboratories Under Various Conditions(Ns =30 to 34) Median Selections on Questions Related to the Safety of Research and Development Synthesis Laboratories Under Various Conditions (Ns = 30 to 34) Modal Selections on Questions Related to the Safety of Research and Development Laboratories Using Carbon, Hydrogen, Iodine, Phosphorous, and Sulfur Under Various Conditions (Ns = 37 to 39) Median Selections on Questions Related to the Safety of Research and Development Laboratories Using Carbon, Hydrogen, Iodine, Phosphorous, and Sulfur Under Various Conditions (Ns = 37 to 39) Modal Selections on Questions Related to the Safety of In Vitro Testing Under Various Conditions (Ns = 37 to 39) Modal Selections on Questions Related to the Safety of In Vitro Testing Under Various Conditions (Ns = 37 to 39) Median Selections on Questions Related to the Safety of In Vitro Testing Under Various Conditions (Ns = 37 to 39) Median Selections on Questions Related to the Safety of In Vitro Testing Under Various Conditions (Ns = 37 to 39) Modal Selections on Questions Related to the Safety of 10 CFR 35.100 - Nuclear Medicine and Human Use Research Under Various Conditions (Ns = 35 to 38) Modal Selections on Questions Related to the Safety of 10 CFR 35.200 — Nuclear Medicine with Generator(s) Under Various Conditions (Ns = 36 to 38)

Table 1.12	Median Selections on Questions Related to the Safety of 10 CFR 35.200 — Nuclear Medicine Without a Generator Under Various Conditions (Ns = 35 to 38) 1-7
Table 1.13	Modal Selections on Questions Related to the Safety of 10 CFR 35.300 — Nuclear Medicine Under Various Conditions (Ns = 35 to 38) 1-8
Table 1.14	Median Selections on Questions Related to the Safety of 10 CFR 35.300 — Nuclear Medicine Under Various Conditions (Ns = 35 to 38) 1-8
Table 1.15	Modal Selections on Questions Related to the Safety of Brachytherapy — Using Seeds Under Various Conditions (Ns = 36 to 37) 1-9
Table 1.16	Median Selections on Questions Related to the Safety of Brachytherapy — Using Seeds Under Various Conditions (Ns = 36 to 37) 1-10
Table 1.17	Modal Selections on Questions Related to the Safety of Brachytherapy — Manual Afterloading Under Various Conditions (Ns = 33 to 34) 1-10
Table 1.18	Median Selections on Questions Related to the Safety of Brachytherapy — Manual Afterloading Under Various Conditions (Ns = 33 to 34) 1-11
Table 1.19	Modal Selections on Questions Related to the Safety of Brachytherapy — Low Dose Rate Remote Afterloading Under Various Conditions (Ns = 32 to 34) 1-12
Table 1.20	Modal Selections on Questions Related to the Safety of Brachytherapy — Low Dose Rate Remote Afterloading Under Various Conditions (Ns = 32 to 34) 1-12
Table 1.21	Modal Selections on Questions Related to the Safety of Brachytherapy — High Dose Rate Remote Afterloading Under Various Conditions (Ns = 36 to 38) 1-13
Table 1.22	Median Selections on Questions Related to the Safety of Brachytherapy — High Dose Rate Remote Afterloading Under Various Conditions (Ns = 36 to 38) 1-13
Table 1.23	Modal Selections on Questions Related to the Safety of Brachytherapy — Eye Applicator Under Various Conditions (Ns = 31 to 32) 1-14
Table 1.24	Median Selections on Questions Related to the Safety of Brachytherapy — Eye Applicator Under Various Conditions (Ns = 31 to 32) 1-14
Table 1.25	Modal Selections on Questions Related to the Safety of 10 CFR 35.400 — Diagnostic Devices Under Various Conditions (Ns = 22 to 25) 1-15
Table 1.26	Median Selections on Questions Related to the Safety of 10 CFR 35.400 — Diagnostic Devices Under Various Conditions (Ns = 22 to 25) 1-15
Table 1.27	Modal Selections on Questions Related to the Safety of 10 CFR 35.500 — Diagnostic Devices Under Various Conditions (Ns = 7 to 8)
Table 1.28	Median Selections on Questions Related to the Safety of 10 CFR 35.500 — Diagnostic Devices Under Various Conditions (Ns = 7 to 8)
Table 1.29	Modal Selections on Questions Related to the Safety of Teletherapy Devices Under Various Conditions (Ns = 35 to 36) 1-17
Table 1.30	Median Selections on Questions Related to the Safety of Teletherapy Devices Under Various Conditions (Ns = 35 to 36)
Table 1.31	Modal Selections on Questions Related to the Safety of Gamma Stereotactic Surgery Under Various Conditions (Ns = 24 to 25) 1-18
Table 1.32	Median Selections on Questions Related to the Safety of Gamma Stereotactic Surgery Under Various Conditions (Ns = 24 to 25) 1-18
Table 1.33	Modal Selections on Questions Related to the Safety of Nuclear Pharmacies Under Various Conditions (Ns = 34 to 37)
Table 1.34	Median Selections on Questions Related to the Safety of Nuclear Pharmacies Under Various Conditions (Ns = 34 to 37)

Table 1.35	Modal Selections on Questions Related to the Safety of Veterinary Use Under Various Conditions (Ns = 28 to 33)	1-20
Table 1.36	Median Selections on Questions Related to the Safety of Veterinary Use Under Various Conditions (Ns = 28 to 33)	1-20
Table 1.37	Modal Selections on Questions Related to the Safety of Research and Development on Animals Under Various Conditions (Ns = 29 to 34)	1-21
Table 1.38	Median Selections on Questions Related to the Safety of Research and Development on Animals Under Various Conditions (Ns = 29 to 34)	1-21
Table 1.39	Modal Selections on Questions Related to the Safety of Well Logging — Tracers and Field Flood Studies Under Various Conditions (Ns = 27 to 28)	1-22
Table 1.40	Median Selections on Questions Related to the Safety of Well Logging — Tracers and Field Flood Studies Under Various Conditions (Ns = 27 to 28)	1-22
Table 1.41	Modal Selections on Questions Related to the Safety of Well Logging — Using Sealed Sources Under Various Conditions (Ns = 28 to 30)	1-23
Table 1.42	Median Selections on Questions Related to the Safety of Well Logging — Using Sealed Sources Under Various Conditions (Ns = 28 to 30)	1-23
Table 1.43	Modal Selections on Questions Related to the Safety of Radiography — Permanent Installation Under Various Conditions (Ns = 37 to 38)	1-24
Table 1.44	Median Selections on Questions Related to the Safety of Radiography — Permanent Installation Under Various Conditions (Ns = 37 to 38)	1-25
Table 1.45	Modal Selections on Questions Related to the Safety of Radiography — Field Use Under Various Conditions (Ns = 38 to 39)	1-26
Table 1.46	Median Selections on Questions Related to the Safety of Radiography — Field Use Under Various Conditions (Ns = 38 to 39)	1-26
Table 1.47	Modal Selections on Questions Related to the Safety of Pool Irradiators Under Various Conditions (Ns = 35 to 37)	1-27
Table 1.48	Median Selections on Questions Related to the Safety of Pool Irradiators Under Various Conditions (Ns = 35 to 37)	1-27
Table 1.49	Modal Selections on Questions Related to the Safety of Self-shielded Irradiators Under Various Conditions (Ns = 34 to 38)	1-28
Table 1.50	Median Selections on Questions Related to the Safety of Self-shielded Irradiators Under Various Conditions (Ns = 34 to 38)	1-28
Table 1.51	Modal Selections on Questions Related to the Safety of Fixed Gauges — Gamma Emitters Under Various Conditions (Ns = 37 to 38)	1-29
Table 1.52	Median Selections on Questions Related to the Safety of Fixed Gauges — Gamma Emitters Under Various Conditions (Ns = 37 to 38)	
Table 1.53	Modal Selections on Questions Related to the Safety of Fixed Gauges — Beta Emitters Under Various Conditions (Ns = 36 to 37)	1-30
Table 1.54	Median Selections on Questions Related to the Safety of Fixed Gauges — Beta Emitters Under Various Conditions (Ns = 36 to 37)	1-30
Table 1.55	Modal Selections on Questions Related to the Safety of Portable Gauges Under Various Conditions (Ns = 37 to 38)	1-31
Table 1.56	Median Selections on Questions Related to the Safety of Portable Gauges Under Various Conditions (Ns = 37 to 38)	
Table 1.57	Modal Selections on Questions Related to the Safety of X-ray Fluorescence Devices Under Various Conditions (Ns = 36 to 37)	

Table 1.58	Median Selections on Questions Related to the Safety of X-ray Fluorescence Devices Under Various Conditions (Ns = 36 to 37) 1-33
Table 1.59	Modal Selections on Questions Related to the Safety of Gas Chromatographs Under Various Conditions (Ns = 37 to 40)
Table 1.60	Median Selections on Questions Related to the Safety of Gas Chromatographs Under Various Conditions (Ns = 37 to 40)
Table 1.61	Modal Selections on Questions Related to the Safety of Other Measuring Systems Under Various Conditions (Ns = 29 to 30) 1-34
Table 1.62	Median Selections on Questions Related to the Safety of Other Measuring Systems Under Various Conditions (Ns = 29 to 30) 1-35
Table 1.63	Modal Selections on Questions Related to the Safety of Small Sealed Sources or Devices Under Various Conditions (Ns = 37 to 38) 1-35
Table 1.64	Median Selections on Questions Related to the Safety of Small Sealed Sources or Devices Under Various Conditions (Ns = 37 to 38) 1-36
Table 1.65	Modal Selections on Questions Related to the Safety of Very Small Sealed Sources or Devices Under Various Conditions (Ns = 36 to 37) 1-36
Table 1.66	Median Selections on Questions Related to the Safety of Very Small Sealed Sources or Devices Under Various Conditions (Ns = 36 to 37) 1-37
Table 1.67	Modal Selections on Questions Related to the Safety of Manufacturing or Distribution of Devices Containing Sealed Sources Under Various Conditions (Ns = 37 to 38) 1-37
Table 1.68	Median Selections on Questions Related to the Safety of Manufacturing or Distribution of Devices Containing Sealed Sources Under Various Conditions (Ns = 37 to 38) 1-38
Table 1.69	Modal Selections on Questions Related to the Safety of Manufacturing of Radioactive Solids Under Various Conditions (Ns = 23 to 26) 1-39
Table 1.70	Median Selections on Questions Related to the Safety of Manufacturing of Radioactive Solids Under Various Conditions (Ns = 23 to 26) 1-39
Table 1.71	Modal Selections on Questions Related to the Safety of Manufacturing of Sources Containing Liquids Under Various Conditions (Ns = 20 to 23) 1-40
Table 1.72	Median Selections on Questions Related to the Safety of Manufacturing of Sources Containing Liquids Under Various Conditions (Ns = 20 to 23) 1-40
Table 1.73	Modal Selections on Questions Related to the Safety of Manufacturing of Sources Containing Gases Under Various Conditions (Ns = 18 to 21) 1-41
Table 1.74	Median Selections on Questions Related to the Safety of Manufacturing of Sources Containing Gases Under Various Conditions (Ns = 18 to 21) 1-41
Table 1.75	Modal Selections on Questions Related to the Safety of Incineration of Waste Under Various Conditions (Ns = 25 to 27)
Table 1.76	Median Selections on Questions Related to the Safety of Incineration of Waste Under Various Conditions (Ns = 25 to 27)
Table 1.77	Modal Selections on Questions Related to the Safety of Compacting of Waste Under Various Conditions (Ns = 25 to 28)
Table 1.78	Median Selections on Questions Related to the Safety of Compacting of Waste Under Various Conditions (Ns = 25 to 28)
Table 1.79	Modal Selections on Questions Related to the Safety of Packaging of Waste Under Various Conditions (Ns = 24 to 28)
Table 1.80	Median Selections on Questions Related to the Safety of Packaging of Waste Under Various Conditions (Ns = 24 to 28)

Table 1.81	Modal Selections on Questions Related to the Safety of Solidification of Waste Under Various Conditions (Ns = 19 to 22)
Table 1.82	Median Selections on Questions Related to the Safety of Solidification of Waste Under Various Conditions (Ns = 19 to 22)
Table 2.1	Survey Results: Nuclear Byproduct Material Systems Rank Ordered With Respect To Mean Annual Estimated Dose to Workers in Millirem For Comparison With Modal and Median Dose Estimates And With Responses Related To Perceived Safety Under Various Conditions 2-1
Table 3.1	Each Respondent's Definition of "Very Safe," "Somewhat Safe," "Somewhat Unsafe," and "Very Unsafe"
Table 4.1	Responses to Questions Concerning About Regulatory Agencies Should Make Decisions 4-1

This section summarizes the respondent's opinions about typical annual worker doses for each system, the safety of each system under various conditions, and the most frequent non-reportable incidents for each system. It is important to note that NUREG-1712 uses many of the same system categories as shown in NUREG/CR-6642, "Risk Analysis and Evaluation of Regulatory Options for Nuclear Byproduct Material Systems," Table 1.4-1, but the systems listed in this NUREG are not identical to those in this NUREG/CR-6642. The numbering of the systems in NUREG-1712 is also different from NUREG/CR-6642. Also, the results from NUREG-1712 were not used in NUREG/CR-6642.

Item 1, under each system, summarizes the respondent's opinions about the number of workers typically receiving annual doses below specific levels (e.g., 50 mrem/yr, 500 mrem/yr, etc.). Respondents were asked to indicate what percentage of workers typically received doses in various ranges. They could choose a single range for all workers or distribute workers over several dose ranges. Respondents exercised both options. Thus, the distribution of doses over various ranges reflects both the individual opinions of respondents as well as the opinions of respondents as a group.

Item 2, under each system, summarizes the respondent's opinions of whether a system was very safe, somewhat safe, somewhat unsafe, or very unsafe under normal operations and off-normal operations both with and without current regulations. "Safety" was not predefined for the respondents (i.e., their opinions about the safety of systems were expected to reflect their personal definitions of safety). A subsequent question asked respondents for their own definitions of very safe, somewhat safe, somewhat unsafe, and very unsafe. Tables based on modal responses and median responses are both provided. Both tables frequently are the same, but for some systems the tables differ and the ability to compare the two appears to offer additional value.

Item 3, under each system, summarizes the respondent's opinions about the most typical nonreportable events occurring under that system. Respondents were asked to indicate the event that they felt was most likely. Thus, the set of events for each system reflects the opinions of the respondents as a group rather than the opinions of individual respondents. The lists of events may be reflective of the respondents' opinions about what "off-normal" operations mean for each system and, thus, the safety of the various systems under off-normal conditions. The respondents' views about typical events may also have influenced estimates of the percentage of persons falling into various dose ranges. Respondents were also asked to provide an opinion about the frequency of the events that they indicated. That information is also summarized in Item 3.

1.1 SYSTEM 1: RESEARCH AND DEVELOPMENT SYNTHESIS LABORATORIES

- 1. Estimated percentage of workers receiving doses at various levels (N=29):
 - 75% < 50 mrem/yr
 - 98% < 500 mrem/yr
 - 99% < 1000 mrem/yr
 - 1% > 1000 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.1Modal Selections on Questions Related to the Safety of Research
and Development Synthesis Laboratories Under Various Conditions
(Ns =30 to 34)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe, 50%	Somewhat safe, 45%
Off-normal (barrier failure)	Somewhat safe, 50%	Somewhat unsafe, 41%

Table 1.2Median Selections on Questions Related to the Safety of Research
and Development Synthesis Laboratories Under Various Conditions
(Ns = 30 to 34)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe/somewhat safe	Somewhat safe
Off-normal (barrier failure)	Somewhat safe	Somewhat unsafe

- 3. Responses to question about most frequent non-reportable event (N = 27):
 - contamination, frequency varied from 1 time per week to less often than 1 time per year (9 of 27)
 - spills, frequency varied from 1 time per month to 1 time per year (14 of 27)
 - spills and contamination, frequency varied from 1 time per week to 1 time per month (3 of 27)
 - loss of hood containment, 1 time per month (1 of 27)

1.2 SYSTEM 2: RESEARCH AND DEVELOPMENT LABORATORIES USING CARBON, HYDROGEN, IODINE, PHOSPHOROUS, AND SULFUR

- 1. Estimated percentage of workers receiving doses at various levels (N = 36):
 - 87% < 50 mrem/yr
 - 100% < 500 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.3Modal Selections on Questions Related to the Safety of Research
and Development Laboratories Using Carbon, Hydrogen, Iodine,
Phosphorous, and Sulfur Under Various Conditions (Ns = 37 to 39)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe, 51%	Somewhat safe, 53%
Off-normal (barrier failure)	Somewhat safe, 59%	Somewhat safe, 42%

Table 1.4Median Selections on Questions Related to the Safety of Research
and Development Laboratories Using Carbon, Hydrogen, Iodine,
Phosphorous, and Sulfur Under Various Conditions (Ns = 37 to 39)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe	Somewhat safe
Off-normal (barrier failure)	Somewhat safe	Somewhat unsafe

- 3. Responses to question about most frequent non-reportable event (N = 36):
 - contamination, frequency varied from 1 time per week to 1 time per year (15 of 36)
 - spills, frequency varied from 1 time per week to less often than 1 time per year (17 of 36)
 - spills and contamination, frequency varied from 1 time per week to 1 time per month (4 of 36)

1.3 SYSTEM 3: IN VITRO TESTING

- 1. Estimated percentage of workers receiving doses at various levels (N = 36):
 - 96% < 50 mrem/yr
 - 100% < 100 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.5Modal Selections on Questions Related to the Safety of In VitroTesting Under Various Conditions (Ns = 37 to 39)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe, 87%	Very safe, 50%
Off-normal (barrier failure)	Very safe, 51%	Somewhat safe, 42%

Table 1.6Median Selections on Questions Related to the Safety of In Vitro
Testing Under Various Conditions (Ns = 37 to 39)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe	Very safe/somewhat safe
Off-normal (barrier failure)	Very safe	Somewhat safe

- 3. Responses to question about most frequent non-reportable event (N = 33):
 - contamination, frequency varied from 1 time per month to less often than 1 time per year (15 of 33)
 - spills, frequency varied from 1 time per month to less often than 1 time per year (12 of 33)
 - spills and contamination, frequency of 1 time per month (1 of 33)
 - loss of material, frequency varied from 1 time per year to less often than 1 time per year (5 of 33)

1.4 SYSTEM 4: 10 CFR 35.100 — NUCLEAR MEDICINE AND HUMAN USE RESEARCH

- 1. Estimated percentage of workers receiving doses at various levels (N = 31):
 - 39% < 50 mrem/yr
 - 99% < 500 mrem/yr
 - 100% < 1000 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.7Modal Selections on Questions Related to the Safety of
10 CFR 35.100 - Nuclear Medicine and Human Use Research Under
Various Conditions (Ns = 35 to 38)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe, 58%	Somewhat safe, 37%
Off-normal (barrier failure)	Somewhat safe, 41%	Somewhat unsafe, 34%

Table 1.8Median Selections on Questions Related to the Safety of
10 CFR 35.100 - Nuclear Medicine and Human Use Research Under
Various Conditions (Ns = 35 to 38)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe	Somewhat safe
Off-normal (barrier failure)	Somewhat safe	Somewhat safe

- 3. Responses to question about most frequent non-reportable event (N = 27):
 - contamination, frequency varied from 1 time per week to 1 time per year (11 of 27)
 - spills, frequency varied from 1 time per week to less often than 1 time per year (15 of 27)
 - spills and contamination, frequency of 1 time per year (1 of 27)

1.5 SYSTEM 5: 10 CFR 35.200 — NUCLEAR MEDICINE WITH GENERATOR(S)

- 1. Estimated percentage of workers receiving doses at various levels (N = 33):
 - 13% < 50 mrem/yr
 - 82% < 500 mrem/yr
 - 97% < 1000 mrem/yr
 - 3% > 1000 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.9Modal Selections on Questions Related to the Safety of
10 CFR 35.200 — Nuclear Medicine with Generator(s) Under Various
Conditions (Ns = 36 to 38)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe, 61%	Somewhat safe, 36%
Off-normal (barrier failure)	Somewhat unsafe, 50%	Somewhat unsafe, 39%

Table 1.10Median Selections on Questions Related to the Safety of10 CFR 35.200 — Nuclear Medicine with Generator(s) Under VariousConditions (Ns = 36 to 38)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe	Somewhat unsafe
Off-normal (barrier failure)	Somewhat unsafe	Somewhat unsafe

- 3. Responses to question about most frequent non-reportable event (N = 33)
 - contamination, frequency varied from 1 time per week to 1 time per year (14 of 33)
 - spills, frequency varied from 1 time per week to less often than 1 time per year (16 of 33)
 - spills and contamination, frequency varied from 1 time per week to 1 time per quarter (2 of 33)
 - misadministration, frequency of 1 time per month (1 of 33)

1.6 SYSTEM 6: 10 CFR 35.200 — NUCLEAR MEDICINE WITHOUT A GENERATOR

- 1. Estimated percentage of workers receiving doses at various levels (N = 36):
 - 28% < 50 mrem/yr
 - 95% < 500 mrem/yr
 - 100% < 1000 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.11Modal Selections on Questions Related to the Safety of
10 CFR 35.200 — Nuclear Medicine Without a Generator Under
Various Conditions (Ns = 35 to 38)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe, 53%	Somewhat safe, 49%
Off-normal (barrier failure)	Somewhat safe, 40%	Somewhat unsafe, 39%

Table 1.12Median Selections on Questions Related to the Safety of
10 CFR 35.200 — Nuclear Medicine Without a Generator Under
Various Conditions (Ns = 35 to 38)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe	Somewhat safe
Off-normal (barrier failure)	Somewhat safe	Somewhat unsafe

- 3. Responses to question about most frequent non-reportable event (N = 33)
 - contamination, frequency varied from 1 time per week to 1 time per year (17 of 33)
 - spills, frequency varied from 1 time per week to less often than 1 time per year (14 of 33)
 - spills and contamination, frequency of 1 time per quarter (1 of 33)
 - misadministration, frequency of 1 time per month (1 of 33)

1.7 SYSTEM 7: 10 CFR 35.300 — NUCLEAR MEDICINE

- 1. Estimated percentage of workers receiving doses at various levels (N = 29):
 - 22% < 50 mrem/yr
 - 92% < 500 mrem/yr
 - 98% < 1000 mrem/yr
 - 2% > 1000 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.13Modal Selections on Questions Related to the Safety of
10 CFR 35.300 — Nuclear Medicine Under Various Conditions
(Ns = 35 to 38)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe, 45%	Somewhat unsafe, 40%
Off-normal (barrier failure)	Somewhat unsafe, 46%	Somewhat unsafe, 47%

Table 1.14Median Selections on Questions Related to the Safety of
10 CFR 35.300 — Nuclear Medicine Under Various Conditions
(Ns = 35 to 38)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe	Somewhat unsafe
Off-normal (barrier failure)	Somewhat unsafe	Somewhat unsafe

- 3. Responses to question about most frequent non-reportable event (N = 29)
 - contamination, frequency varied from 1 time per week to less often than 1 time per year (17 of 29)
 - spills, frequency varied from 1 time per week to time per year (9 of 29)
 - misadministration, frequency varied from 1 time per year to less often than 1 time per year (2 of 29)
 - loss of material, of 1 time per quarter (1 of 29)

1.8 SYSTEM 8: BRACHYTHERAPY — USING SEEDS

1. Estimated percentage of workers receiving doses at various levels (N = 28):

- 30% < 50 mrem/yr
- 93% < 500 mrem/yr
- 99% < 1000 mrem/yr
- 1% > 1000mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.15Modal Selections on Questions Related to the Safety of
Brachytherapy — Using Seeds Under Various Conditions
(Ns = 36 to 37)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe, 51%	Somewhat unsafe, 42%
Off-normal (barrier failure)	Somewhat unsafe, 54%	Very unsafe, 47%

Table 1.16Median Selections on Questions Related to the Safety of
Brachytherapy — Using Seeds Under Various Conditions
(Ns = 36 to 37)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe	Somewhat unsafe
Off-normal (barrier failure)	Somewhat unsafe	Very unsafe

3. Responses to question about most frequent non-reportable event (N = 26)

- loss of material, frequency varied from 1 time per year to less often than 1 time per year (24 of 26)
- misadministration, frequency of less often than 1 time per year (1 of 26)
- drop and survey, frequency of 1 time per year (1 of 26)

1.9 SYSTEM 9: BRACHYTHERAPY — MANUAL AFTERLOADING

- 1. Estimated percentage of workers receiving doses at various levels (N = 22):
 - 35% < 50 mrem/yr
 - 87% < 500 mrem/yr
 - 94% < 1000 mrem/yr
 - 6% > 1000 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.17Modal Selections on Questions Related to the Safety of
Brachytherapy — Manual Afterloading Under Various Conditions
(Ns = 33 to 34)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe, 44%	Very unsafe, 41%
Off-normal (barrier failure)	Somewhat unsafe, 47%	Very unsafe, 64%

Table 1.18Median Selections on Questions Related to the Safety of
Brachytherapy — Manual Afterloading Under Various Conditions
(Ns = 33 to 34)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe	Very unsafe
Off-normal (barrier failure)	Somewhat unsafe	Very unsafe

- 3. Responses to question about most frequent non-reportable event (N = 17)
 - inadequate shielding, frequency of less often than 1 time per year (1 of 17)
 - loss of material, frequency varied from 1 time per year to less often than 1 time per year (7 of 17)
 - misadministration, frequency varied from 1 time per year to less often than 1 time per year (7 of 17)
 - recordable incident, frequency varied from 1 time per year to less often than 1 time per year (2 of 17)

1.10 SYSTEM 10: BRACHYTHERAPY — LOW DOSE RATE REMOTE AFTERLOADING

- 1. Estimated percentage of workers receiving doses at various levels (N = 19):
 - 65% < 50 mrem/yr
 - 95% < 100 mrem/yr
 - 100% < 1000 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.19Modal Selections on Questions Related to the Safety of
Brachytherapy — Low Dose Rate Remote Afterloading Under Various
Conditions (Ns = 32 to 34)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe, 53%	Somewhat unsafe, 44%
Off-normal (barrier failure)	Somewhat unsafe, 41%	Very unsafe, 50%

Table 1.20Modal Selections on Questions Related to the Safety of
Brachytherapy — Low Dose Rate Remote Afterloading Under Various
Conditions (Ns = 32 to 34)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe	Somewhat unsafe
Off-normal (barrier failure)	Somewhat unsafe	Somewhat unsafe/very unsafe

- 3. Responses to question about most frequent non-reportable event (N = 12)
 - interruption of treatment, frequency varied from 1 time per quarter to 1 time per year (2 of 12)
 - loss of material, frequency of lees than 1 time per year (1of 12)
 - misadministration, frequency varied from 1 time per year to less often than 1 time per year (4 of 12)

- device malfunction/failure, frequency of less often than 1 time per year (2 of 12)
- recordable incident, frequency varied from 1 time per quarter to less often than 1 time per year (2 of 12)
- stuck source, frequency of less often than 1 time per year (1 of 12)

1.11 SYSTEM 11: BRACHYTHERAPY — HIGH DOSE RATE REMOTE AFTERLOADING

- 1. Estimated percentage of workers receiving doses at various levels (N = 27):
 - 68% < 50 mrem/yr
 - 96% < 500 mrem/yr
 - 100% < 1000 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.21Modal Selections on Questions Related to the Safety of
Brachytherapy — High Dose Rate Remote Afterloading Under
Various Conditions (Ns = 36 to 38)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe, 59%	Very unsafe, 39%
Off-normal (barrier failure)	Very unsafe, 45%	Very unsafe, 64%

Table 1.22Median Selections on Questions Related to the Safety of
Brachytherapy — High Dose Rate Remote Afterloading Under
Various Conditions (Ns = 36 to 38)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe	Somewhat unsafe
Off-normal (barrier failure)	Somewhat unsafe	Very unsafe

- 3. Responses to question about most frequent non-reportable event (N = 16)
 - interruption of treatment, frequency of 1 time per quarter (1of 16)
 - loss of material, frequency of less often than 1 time per year (1of 16)

- misadministration, frequency of 1 time per month (5 of 16)
- device malfunction/failure, frequency varied from 1 time per year to less often than 1 time per year (4 of 16)
- recordable incident, frequency varied from 1 time per quarter to 1 time per year (2 of 16)
- stuck source, frequency of less often than 1 time per year (3 of 16)

1.12 SYSTEM 12: BRACHYTHERAPY — EYE APPLICATOR

- 1. Estimated percentage of workers receiving doses at various levels (N = 23):
 - 82% < 50 mrem/yr
 - 100% < 500 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.23Modal Selections on Questions Related to the Safety of
Brachytherapy — Eye Applicator Under Various Conditions
(Ns = 31 to 32)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	-	Somewhat safe/very unsafe, 29% each
Off-normal (barrier failure)	Somewhat unsafe, 42%	Somewhat unsafe, 41%

Table 1.24Median Selections on Questions Related to the Safety of
Brachytherapy — Eye Applicator Under Various Conditions
(Ns = 31 to 32)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe	Somewhat unsafe
Off-normal (barrier failure)	Somewhat unsafe	Somewhat unsafe

- 3. Responses to question about most frequent non-reportable event (N = 11)
 - exposure, frequency of less often than 1 time per year (1 of 11)
 - loss of material, frequency varied from 1 time per year to less often than 1 time per year (6 of 11)
 - misadministration, frequency varied from 1 time per quarter to less often than 1 time per year (4 of 11)

1.13 SYSTEM 13: 10 CFR 35.400 — DIAGNOSTIC DEVICES¹

- 1. Estimated percentage of workers receiving doses at various levels (N = 19):
 - 84% < 50 mrem/yr
 - 99% < 500 mrem/yr
 - 100% < 1000 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.25Modal Selections on Questions Related to the Safety of
10 CFR 35.400 — Diagnostic Devices Under Various Conditions
(Ns = 22 to 25)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe, 68%	Somewhat safe, 46%
Off-normal (barrier failure)	Somewhat safe, 58%	Somewhat safe, 48%

¹ This system is the result of an error in the survey form. The form read "10 CFR 400 — Diagnostic Devices" instead of "10 CFR 500 — Diagnostic Devices" as it should have. Some respondents noted the error in the survey form. Their responses are recorded under system 13a. The responses of those who did not note the error were recorded under this system (13).

Table 1.26Median Selections on Questions Related to the Safety of
10 CFR 35.400 — Diagnostic Devices Under Various Conditions
(Ns = 22 to 25)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe	Somewhat safe
Off-normal (barrier failure)	Somewhat safe	Somewhat safe/somewhat unsafe

- 3. Responses to question about most frequent non-reportable event (N = 4)
 - Loss of material, frequency of less often than 1 time per year (2 of 4)
 - Not secured, frequency of less often than 1 time per year (1 of 4)
 - spill, frequency of 1 time quarter (1 of 4)

1.14 SYSTEM 13A: 10 CFR 35.500 — DIAGNOSTIC DEVICES

- 1. Estimated percentage of workers receiving doses at various levels (N = 7):
 - 84% < 50 mrem/yr
 - 100% < 100 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.27Modal Selections on Questions Related to the Safety of
10 CFR 35.500 — Diagnostic Devices Under Various Conditions
(Ns = 7 to 8)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe, 88%	Somewhat safe, 38%
Off-normal (barrier failure)	Somewhat safe, 50%	Very safe, 43%

Table 1.28Median Selections on Questions Related to the Safety of
10 CFR 35.500 — Diagnostic Devices Under Various Conditions
(Ns = 7 to 8)

Normal (barriers intact)	Very safe	Somewhat safe
Off-normal (barrier failure)	Somewhat safe	Somewhat safe

- 3. Responses to question about most frequent non-reportable event (N = 2)
 - exposure, frequency of less often than 1 time per year (1 of 2)
 - loss of material, frequency of less often than 1 time per year (1 of 2)

1.15 SYSTEM 14: TELETHERAPY DEVICES

- 1. Estimated percentage of workers receiving doses at various levels (N = 29):
 - 81% < 50 mrem/yr
 - 96% < 500 mrem/yr
 - 99% < 1000 mrem/yr
 - 1% > 1000 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.29Modal Selections on Questions Related to the Safety of Teletherapy
Devices Under Various Conditions (Ns = 35 to 36)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe, 44%	Somewhat unsafe, 37%
Off-normal (barrier failure)	Very unsafe, 50%	Very unsafe, 63%

Table 1.30Median Selections on Questions Related to the Safety of Teletherapy
Devices Under Various Conditions (Ns = 35 to 36)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe	Somewhat unsafe
	Somewhat unsafe/very unsafe	Very unsafe

- 3. Responses to question about most frequent non-reportable event (N = 17)
 - loss of material, frequency of less often than 1 time per year (1 of 17)
 - misadministration, frequency varied from 1 time per year to less often than 1 time per year (5 of 17)
 - device malfunction/failure, frequency of 1 time per month (1 of 17)
 - loss of material, frequency of less often than 1 time per year (2 of 17)
 - recordable incident, frequency varied from 1 time per quarter to 1 time per year (2 of 17)
 - stuck source, frequency varied from 1 time per quarter to less often than 1 time per year (7 of 17)

1.16 SYSTEM 15: GAMMA STEREOTACTIC SURGERY

- 1. Estimated percentage of workers receiving doses at various levels (N = 29):
 - 68% < 50 mrem/yr
 - 93% < 500 mrem/yr
 - 99% < 1000 mrem/yr
 - 1% > 1000 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.31Modal Selections on Questions Related to the Safety of GammaStereotactic Surgery Under Various Conditions (Ns = 24 to 25)

	With Current Regulations	Without Current Regulations
. ,	Very safe/somewhat safe, 40% each	Somewhat unsafe, 36%
Off-normal (barrier failure)	Very unsafe, 50%	Very unsafe, 64%

Table 1.32Median Selections on Questions Related to the Safety of GammaStereotactic Surgery Under Various Conditions (Ns = 24 to 25)

With Current Regulations W	Without Current Regulations
------------------------------	-----------------------------

Normal (barriers intact)	Somewhat safe	Somewhat unsafe
Off-normal (barrier failure)	Somewhat unsafe/very unsafe	Very unsafe

- 3. Responses to question about most frequent non-reportable event (N = 7)
 - misadministration, frequency of less often than 1 time per year (4 of 7)
 - device malfunction/failure, frequency of less often than 1 time per year (3 of 4)

1.17 SYSTEM 16: NUCLEAR PHARMACIES

- 1. Estimated percentage of workers receiving doses at various levels (N = 34):
 - 15% < 50 mrem/yr
 - 75% < 500 mrem/yr
 - 95% < 1000 mrem/yr
 - 5% > 1000 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.33Modal Selections on Questions Related to the Safety of NuclearPharmacies Under Various Conditions (Ns = 34 to 37)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe, 61%	Somewhat unsafe, 49%
Off-normal (barrier failure)	Somewhat unsafe, 44%	Very unsafe, 50%

Table 1.34Median Selections on Questions Related to the Safety of NuclearPharmacies Under Various Conditions (Ns = 34 to 37)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe	Somewhat unsafe
Off-normal (barrier failure)	Somewhat unsafe	Somewhat unsafe/very unsafe

3. Responses to question about most frequent non-reportable event (N = 33)

- contamination, frequency varied from 1 time per week to less often than 1 time per year (18 of 33)
- loss of material, frequency varied of 1 time per year (1 of 33)
- spill, frequency varied from 1 time per week to 1 time per year (9 of 33)
- spill and contamination, frequency varied from 1 time per week to 1 time per quarter (3 of 33)
- wrong label, frequency varied from 1 time per quarter to less often than 1 time per year (2 of 33)

1.18 SYSTEM 17: VETERINARY USE

- 1. Estimated percentage of workers receiving doses at various levels (N = 22):
 - 49% < 50 mrem/yr
 - 96% < 500 mrem/yr
 - 97% < 1000 mrem/yr
 - 3% > 1000 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.35Modal Selections on Questions Related to the Safety of Veterinary
Use Under Various Conditions (Ns = 28 to 33)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe, 52%	Somewhat safe, 46%
Off-normal (barrier failure)	Somewhat safe, 64%	Somewhat unsafe, 48%

Table 1.36Median Selections on Questions Related to the Safety of Veterinary
Use Under Various Conditions (Ns = 28 to 33)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe	Somewhat safe
Off-normal (barrier failure)	Somewhat safe	Somewhat unsafe

3. Responses to question about most frequent non-reportable event (N = 20)

- contamination, frequency varied from 1 time per week to less often than 1 time per year (14 of 20)
- contaminated animal waste, frequency of 1 time per week (1 of 20)
- Early release of animal, frequency of less often than 1 time per year (1 of 20)
- Spill, frequency varied from 1 time per quarter to less often than 1 time per year (4 of 20)

1.19 SYSTEM 18: RESEARCH AND DEVELOPMENT ON ANIMALS

- 1. Estimated percentage of workers receiving doses at various levels (N = 22):
 - 71% < 50 mrem/yr
 - 100% < 500 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.37Modal Selections on Questions Related to the Safety of Research
and Development on Animals Under Various Conditions
(Ns = 29 to 34)

	With Current Regulations	Without Current Regulations
× , , , , , , , , , , , , , , , , , , ,	Very safe/somewhat safe, 47% each	Somewhat safe, 39%
Off-normal (barrier failure)	Somewhat safe, 62%	Somewhat safe, 50%

Table 1.38Median Selections on Questions Related to the Safety of Research
and Development on Animals Under Various Conditions
(Ns = 29 to 34)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe	Somewhat safe
Off-normal (barrier failure)	Somewhat safe	Somewhat safe/somewhat
		unsafe

3. Responses to question about most frequent non-reportable event (N = 25)

- contamination, frequency varied from 1 time per week to less often than 1 time per year (20 of 25)
- contaminated animal waste, frequency varied from 1 time per month to 1 time per quarter (2 of 25)
- spill, frequency varied from 1 time per month to 1 time per quarter (3 of 25)

1.20 SYSTEM 19: WELL-LOGGING — TRACERS AND FIELD FLOOD STUDIES

- 1. Estimated percentage of workers receiving doses at various levels (N = 15):
 - 36% < 50 mrem/yr
 - 96% < 500 mrem/yr
 - 99% < 1000 mrem/yr
 - 1% > 1000 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.39Modal Selections on Questions Related to the Safety of Well Logging
— Tracers and Field Flood Studies Under Various Conditions
(Ns = 27 to 28)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe, 50%	Somewhat safe/somewhat unsafe, 33% each
Off-normal (barrier failure)	Somewhat safe/somewhat unsafe, 35% each	Somewhat unsafe, 39%

Table 1.40Median Selections on Questions Related to the Safety of Well
Logging — Tracers and Field Flood Studies Under Various
Conditions (Ns = 27 to 28)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe	Somewhat unsafe
Off-normal (barrier failure)	Somewhat unsafe	Somewhat unsafe

- 3. Responses to question about most frequent non-reportable event (N = 15)
 - contamination, frequency varied from 1 time per week to less often than 1 time per year (10 of 15)
 - spills, frequency varied from 1 time per quarter to less often than 1 time per year (4of 15)
 - spills and contamination, frequency of 1 time per year (1 of 15)

1.21 SYSTEM 20: WELL LOGGING — USING SEALED SOURCES

- 1. Estimated percentage of workers receiving doses at various levels (N = 18):
 - 48% < 50 mrem/yr
 - 93% < 500 mrem/yr
 - 99% < 1000 mrem/yr
 - 1% > 1000 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.41Modal Selections on Questions Related to the Safety of Well
Logging — Using Sealed Sources Under Various Conditions
(Ns = 28 to 30)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe, 61%	Somewhat unsafe, 45%
Off-normal (barrier failure)	Somewhat safe, 40%	Very unsafe, 41%

Table 1.42Median Selections on Questions Related to the Safety of Well
Logging — Using Sealed Sources Under Various Conditions
(Ns = 28 to 30)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe	Somewhat unsafe
Off-normal (barrier failure)	Somewhat unsafe	Somewhat unsafe

3. Responses to question about most frequent non-reportable event (N = 16)

- source disconnect, frequency of less often than 1 time per year (1 of 16)
- exposure, frequency of less often than 1 time per year (1 of 16)
- loss/damage of source, frequency of less often than 1 time per year (1 of 16)
- loss of material, frequency varied from 1 time per year to less often than 1 time per year (10 of 16)
- failure to survey, frequency of 1 time per month (1 of 16)
- stuck source, frequency of 1 time per year (2 0f 16)

1.22 SYSTEM 21: RADIOGRAPHY — PERMANENT INSTALLATION

- 1. Estimated percentage of workers receiving doses at various levels (N = 31):
 - 32% < 50 mrem/yr
 - 86% < 500 mrem/yr
 - 92% < 1000 mrem/yr
 - 8% > 1000 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.43Modal Selections on Questions Related to the Safety of
Radiography — Permanent Installation Under Various Conditions
(Ns = 37 to 38)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe, 50%	Somewhat unsafe, 57%
Off-normal (barrier failure)	Somewhat unsafe, 44%	Very unsafe, 54%

Table 1.44Median Selections on Questions Related to the Safety of
Radiography — Permanent Installation Under Various Conditions
(Ns = 37 to 38)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe	Somewhat unsafe
Off-normal (barrier failure)	Somewhat unsafe	Very unsafe

- 3. Responses to question about most frequent non-reportable event (N = 21)
 - source disconnect, frequency of less often than 1 time per year (1 of 21)
 - exposure, frequency varied from 1 time per week to less often than 1 time per year (5 of 21)
 - failed warning device, frequency of 1 time per year (1 of 21)
 - source not shielded, frequency of 1 time per year (1 of 21)
 - loss of material, frequency of less often than 1 time per year (3 of 21)
 - device malfunction/failure, frequency varied from 1 time per quarter to less often than 1 time per year (5 of 21)
 - failure to survey, frequency of 1 time per month (1 of 21)
 - failure to secure, frequency of 1 time per quarter (1 of 21)
 - stuck source, frequency varied from 1 time per quarter to less often than 1 time per year (3 of 16)

1.23 SYSTEM 22: RADIOGRAPHY — FIELD USE

- 1. Estimated percentage of workers receiving doses at various levels (N = 36):
 - 9% < 50 mrem/yr
 - 65% < 500 mrem/yr
 - 87% < 1000 mrem/yr
 - 13% > 1000 mrem/yr

2. Responses to questions about safety under various conditions.

Table 1.45Modal Selections on Questions Related to the Safety of
Radiography — Field Use Under Various Conditions (Ns = 38 to 39)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe, 44%	Very unsafe, 58%
Off-normal (barrier failure)	Very unsafe, 68%	Very unsafe, 79%

Table 1.46Median Selections on Questions Related to the Safety of
Radiography — Field Use Under Various Conditions (Ns = 38 to 39)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe	Very unsafe
Off-normal (barrier failure)	Very unsafe	Very unsafe

- 3. Responses to question about most frequent non-reportable event (N = 27)
 - source disconnect, frequency varied from 1 time per year to less often than 1 time per year (6 of 26)
 - exposure, frequency varied from 1 time per week to 1 time per year (5 of 26)
 - personnel inattention, frequency of less often than 1 time per year (1 of 26)
 - source not shielded, frequency of 1 time per year (1 of 26)
 - loss of material, frequency varied from 1 time per year to less often than 1 time per year (3 of 26)
 - device malfunction/failure, frequency of 1 time per quarter (2 of 26)
 - failure to survey, frequency of 1 time per month (1 of 26)
 - failure to secure, frequency of 1 time per month (1 of 26)
 - restricted area/boundary violation, frequency of 1 time per month (3 of 26)
 - stuck source, frequency of 1 time per year (1 of 26)
 - untrained user, frequency of less often than 1 time per year (1 of 26)
 - unauthorized user, frequency of 1 time per year (1 of 26)

1.24 SYSTEM 23: POOL IRRADIATORS

- 1. Estimated percentage of workers receiving doses at various levels (N = 29):
 - 77% < 50 mrem/yr
 - 98% < 500 mrem/yr
 - 100% < 1000 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.47Modal Selections on Questions Related to the Safety of PoolIrradiators Under Various Conditions (Ns = 35 to 37)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe, 40%	Very unsafe, 43%
Off-normal (barrier failure)	Very unsafe, 49%	Very unsafe, 64%

Table 1.48Median Selections on Questions Related to the Safety of PoolIrradiators Under Various Conditions (Ns = 35 to 37)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe	Somewhat unsafe
Off-normal (barrier failure)	Somewhat unsafe	Very unsafe

- 3. Responses to question about most frequent non-reportable event (N = 20)
 - contamination, frequency varied from 1 time per year to less often than 1 time per year (2 of 20)
 - exposure, frequency of less often than 1 time per year (1 of 20)
 - loss of material, frequency of less often than 1 time per year (1 of 20)
 - device malfunction/failure, frequency varied from 1 time per week to less often than 1 time per year (8 of 20)
 - failure to secure, frequency of 1 time per year (1 of 20)
 - restricted area/boundary violation, frequency of less often than 1 time per year (1 of 20)

• stuck source, frequency varied from 1 time per year to less often than 1 time per year (6 of 20)

1.25 SYSTEM 24: SELF-SHIELDED IRRADIATORS

- 1. Estimated percentage of workers receiving doses at various levels (N = 32):
 - 96% < 50 mrem/yr
 - 100% < 500 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.49Modal Selections on Questions Related to the Safety of Self-shielded
Irradiators Under Various Conditions (Ns = 34 to 38)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe, 79%	Somewhat safe, 47%
Off-normal (barrier failure)	Somewhat safe, 58%	Somewhat safe,38%

Table 1.50Median Selections on Questions Related to the Safety of
Self-shielded Irradiators Under Various Conditions (Ns = 34 to 38)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe	Somewhat safe
Off-normal (barrier failure)	Somewhat safe	Somewhat safe

- 3. Responses to question about most frequent non-reportable event (N = 16)
 - exposure, frequency varied from 1 time per year to less often than 1 time per year (3 of 16)
 - device falls on your foot, frequency of less often than 1 time per year (1 of 16)
 - loss of material, frequency of less often than 1 time per year (1 of 16)
 - device malfunction/failure, frequency varied from 1 time per year to less often than 1 time per year (6 of 16)
 - failure to secure, frequency of 1 time per year (1 of 16)

- restricted area/boundary violation, frequency of less often than 1 time per year (1 of 20)
- stuck source, frequency of 1 time per quarter (1 of 20)
- unauthorized user/uses, frequency of 1 time per quarter (2 of 16)

1.26 SYSTEM 25: FIXED GAUGES — GAMMA EMITTERS

- 1. Estimated percentage of workers receiving doses at various levels (N = 38):
 - 96% < 50 mrem/yr
 - 100% < 500 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.51Modal Selections on Questions Related to the Safety of FixedGauges — Gamma Emitters Under Various Conditions (Ns = 37 to 38)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe, 55%	Somewhat safe, 57%
Off-normal (barrier failure)	Somewhat safe, 58%	Somewhat safe, 38%

Table 1.52Median Selections on Questions Related to the Safety of FixedGauges — Gamma Emitters Under Various Conditions (Ns = 37 to 38)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe	Somewhat safe
Off-normal (barrier failure)	Somewhat safe	Somewhat unsafe

- 3. Responses to question about most frequent non-reportable event (N = 27)
 - damaged gauge, frequency of less often than 1 time per year (2 of 27)
 - exposure, frequency of less often than 1 time per year (10f 27)
 - failure to close shutter and working close by, frequency of 1 time per month (1 of 27)
 - loss of material, frequency varied from 1 time per year to less often than 1 time per year (10 of 27)

- device malfunction/failure, frequency varied from 1 time per year to less often than 1 time per year (7 of 27)
- maintenance problem, frequency of less often than 1 time per year (1 of 27)
- failure to secure, frequency of 1 time per year (1 of 27)
- unauthorized maintenance, frequency of 1 time per year (1of 27)
- untrained maintenance worker, frequency of less often than 1 time per year (2 of 27)
- unauthorized removal, frequency of 1 time per year (1 of 27)

1.27 SYSTEM 26: FIXED GAUGES — BETA EMITTERS

- 1. Estimated percentage of workers receiving doses at various levels (N = 35):
 - 96% < 50 mrem/yr
 - 100% < 500 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.53Modal Selections on Questions Related to the Safety of FixedGauges — Beta Emitters Under Various Conditions (Ns = 36 to 37)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe, 70%	Somewhat safe, 58%
Off-normal (barrier failure)	Somewhat safe, 81%	Somewhat safe, 47%

Table 1.54Median Selections on Questions Related to the Safety of FixedGauges — Beta Emitters Under Various Conditions (Ns = 36 to 37)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe	Somewhat safe
Off-normal (barrier failure)	Somewhat safe	Somewhat safe

- 3. Responses to question about most frequent non-reportable event (N = 22)
 - device damaged, frequency of less often than 1 time per year (2 of 22)
 - exposure, frequency of less often than 1 time per year (1of 21)

- loss of material, frequency varied from 1 time per year to less often than 1 time per year (8 of 22)
- device malfunction/failure, frequency varied from 1 time per year to less often than 1 time per year (7 of 22)
- failure to secure, frequency of 1 time per year (1 of 22)
- unauthorized maintenance, frequency of 1 time per year (1of 22)
- untrained maintenance worker, frequency of less often than 1 time per year (1 of 22)
- unauthorized removal, frequency of less often than 1 time per year (1 of 22)

1.28 SYSTEM 27: PORTABLE GAUGES

- 1. Estimated percentage of workers receiving doses at various levels (N = 38):
 - 71% < 50 mrem/yr
 - 99% < 500 mrem/yr
 - 100% < 1000 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.55Modal Selections on Questions Related to the Safety of Portable
Gauges Under Various Conditions (Ns = 37 to 38)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe/somewhat safe, 50%	Somewhat safe, 43%
Off-normal (barrier failure)	Somewhat safe, 59%	Somewhat unsafe, 43%

Table 1.56Median Selections on Questions Related to the Safety of Portable
Gauges Under Various Conditions (Ns = 37 to 38)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe/somewhat safe	Somewhat safe
Off-normal (barrier failure)	Somewhat safe	Somewhat unsafe

- 3. Responses to question about most frequent non-reportable event (N = 28)
 - device damaged, frequency varied from 1 time per year to less often than 1 time per year (12 of 28)
 - exposure, frequency of less often than 1 time per year (2 of 28)
 - loss of material, frequency varied from 1 time per year to less often than 1 time per year (9 of 28)
 - device malfunction/failure, frequency of 1 time per quarter (1of 28)
 - maintenance problem, frequency of 1 time per year (1 of 28)
 - failure to secure, frequency varied from 1 time per month to 1 time per quarter (2 of 28)
 - unauthorized user/uses, frequency of 1 time per year (1of 28)

1.29 SYSTEM 28: X-RAY FLUORESCENCE DEVICES

- 1. Estimated percentage of workers receiving doses at various levels (N = 33):
 - 84% < 50 mrem/yr
 - 100% < 500 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.57Modal Selections on Questions Related to the Safety of X-rayFluorescence Devices Under Various Conditions (Ns = 36 to 37)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe, 81%	Somewhat safe, 38%
Off-normal (barrier failure)	Somewhat safe, 51%	Very safe/somewhat safe, 33% each

Table 1.58Median Selections on Questions Related to the Safety of X-rayFluorescence Devices Under Various Conditions (Ns = 36 to 37)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe	Somewhat safe
Off-normal (barrier failure)	Somewhat safe	Somewhat safe

- 3. Responses to question about most frequent non-reportable event (N = 11)
 - exposure, frequency of 1 time per year (2 of 11)
 - source not shielded, frequency of less often than 1 time per year (1 of 11)
 - loss of material, frequency varied from 1 time per year to less often than 1 time per year (3 of 11)
 - leaking source, frequency of less often than 1 time per year (2 of 11)
 - failure to secure, frequency varied from 1 time per month to 1 time per year (2 of 11)
 - stuck source, frequency of 1 time per year (1of 11)

1.30 SYSTEM 29: GAS CHROMATOGRAPHS

- 1. Estimated percentage of workers receiving doses at various levels (N = 40):
 - 100% < 50 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.59Modal Selections on Questions Related to the Safety of Gas
Chromatographs Under Various Conditions (Ns = 37 to 40)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe, 90%	Very safe, 58%
Off-normal (barrier failure)	Very safe, 59%	Very safe, 54%

Table 1.60Median Selections on Questions Related to the Safety of Gas
Chromatographs Under Various Conditions (Ns = 37 to 40)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe	Very safe
Off-normal (barrier failure)	Very safe	Very safe

- 3. Responses to question about most frequent non-reportable event (N = 20)
 - contamination, frequency of 1 time per year (1of 20)
 - exposure, frequency of less often than 1 time per year (1 of 20)
 - loss of material, frequency of less often than 1 time per year (13 of 20)
 - leaking source, frequency of less often than 1 time per year (1 of 20)
 - device malfunction/failure, frequency of less often than 1 time per year (1 of 20)
 - maintenance problem, frequency of less often than 1 time per year (1 of 20)
 - failure to secure, frequency of 1 time per quarter (1 of 20)
 - Failure to vent for H-3, frequency of less often than 1 time per year (1 of 20)

1.31 SYSTEM 30: OTHER MEASURING SYSTEMS

- 1. Estimated percentage of workers receiving doses at various levels (N = 27):
 - 99% < 50 mrem/yr
 - 100% < 500 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.61Modal Selections on Questions Related to the Safety of Other
Measuring Systems Under Various Conditions (Ns = 29 to 30)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe, 76%	Somewhat safe, 53%
Off-normal (barrier failure)	Somewhat safe, 55%	Somewhat safe, 38%

Table 1.62Median Selections on Questions Related to the Safety of Other
Measuring Systems Under Various Conditions (Ns = 29 to 30)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe	Somewhat safe
Off-normal (barrier failure)	Somewhat safe	Somewhat safe

- 3. Responses to question about most frequent non-reportable event (N = 12)
 - device damage, frequency of less often than 1 time per year (1of 12)
 - exposure, frequency of 1 time per year (1 of 12)
 - loss of material, frequency of less often than 1 time per year (8 of 20)
 - device malfunction/failure, frequency of 1 time per year (1 of 12)
 - failure to secure, frequency of 1 time per quarter (1 of 20)
 - Failure to vent for H-3, frequency of 1 time per year (1 of 12)

1.32 SYSTEM 31: SMALL SEALED SOURCES OR DEVICES (e.g., Those Used Under a General License)

- 1. Estimated percentage of workers receiving doses at various levels (N = 29):
 - 97% < 50 mrem/yr
 - 99% < 500 mrem/yr
 - 100% < 1000 mrem/yr
- 3. Responses to questions about safety under various conditions.

Table 1.63Modal Selections on Questions Related to the Safety of Small Sealed
Sources or Devices Under Various Conditions (Ns = 37 to 38)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe, 66%	Very safe, 35%
Off-normal (barrier failure)	Somewhat safe, 45%	Very safe, 32%

Table 1.64Median Selections on Questions Related to the Safety of Small
Sealed Sources or Devices Under Various Conditions (Ns = 37 to 38)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe	Somewhat safe
Off-normal (barrier failure)	Somewhat safe	Somewhat safe

- 3. Responses to question about most frequent non-reportable event (N = 23)
 - loss of material, frequency varied from 1 time per month to less often than 1 time per year (21 of 23)
 - maintenance problem, frequency of 1 time per month (1 of 23)
 - failure to secure, frequency of 1 time per month (1 of 23)

1.33 SYSTEM 32: VERY SMALL SEALED SOURCES OR DEVICES (e.g., Those Used Under Exemption)

- 1. Estimated percentage of workers receiving doses at various levels (N = 26):
 - 100% < 50 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.65Modal Selections on Questions Related to the Safety of Very SmallSealed Sources or Devices Under Various Conditions (Ns = 36 to 37)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe, 89%	Very safe, 60%
Off-normal (barrier failure)	Very safe, 51%	Very safe, 56%

Table 1.66Median Selections on Questions Related to the Safety of Very Small
Sealed Sources or Devices Under Various Conditions (Ns = 36 to 37)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Very safe	Very safe
Off-normal (barrier failure)	Very safe	Very safe

- 3. Responses to question about most frequent non-reportable event (N = 20)
 - fire, frequency varied of less often than 1 time per year (1 of 20)
 - loss of material, frequency varied from 1 time per year to less often than 1 time per year (19 of 20)

1.34 SYSTEM 33: MANUFACTURING OR DISTRIBUTION OF DEVICES CONTAINING SEALED SOURCES

- 1. Estimated percentage of workers receiving doses at various levels (N = 26):
 - 55% < 50 mrem/yr
 - 91% < 500 mrem/yr
 - 95% < 1000 mrem/yr
 - 5% > 1000 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.67Modal Selections on Questions Related to the Safety of
Manufacturing or Distribution of Devices Containing Sealed Sources
Under Various Conditions (Ns = 37 to 38)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe, 53%	Somewhat safe, 35%
Off-normal (barrier failure)	Somewhat unsafe, 38%	Very unsafe, 41%

Table 1.68Median Selections on Questions Related to the Safety of
Manufacturing or Distribution of Devices Containing Sealed Sources
Under Various Conditions (Ns = 37 to 38)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe	Somewhat unsafe
Off-normal (barrier failure)	Somewhat unsafe	Somewhat unsafe

- 3. Responses to question about most frequent non-reportable event (N = 18)
 - contamination, frequency varied from 1 time per week to less often than 1 time per year (6 of 18)
 - defective merchandise, frequency of 1 time per quarter (1 of 18)
 - handling failure, frequency of 1 time per year (1 of 18)
 - loss of material, frequency varied from 1 time per year to less often than 1 time per year (9 of 18)
 - Leaking source, frequency of less often than 1 time per year (1 of 18)

1.35 SYSTEM 34: MANUFACTURING OF RADIOACTIVE SOLIDS

- 1. Estimated percentage of workers receiving doses at various levels (N = 13):
 - 36% < 50 mrem/yr
 - 74% < 500 mrem/yr
 - 88% < 1000 mrem/yr
 - 12% > 1000 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.69Modal Selections on Questions Related to the Safety of
Manufacturing of Radioactive Solids Under Various Conditions
(Ns = 23 to 26)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe, 48%	Very unsafe, 42%
Off-normal (barrier failure)	Very unsafe, 39%	Very unsafe, 46%

Table 1.70Median Selections on Questions Related to the Safety of
Manufacturing of Radioactive Solids Under Various Conditions
(Ns = 23 to 26)

	With Current Regulations	Without Current Regulations
	Somewhat safe/somewhat unsafe	Somewhat unsafe
Off-normal (barrier failure)	Somewhat unsafe	Somewhat unsafe

- 3. Responses to question about most frequent non-reportable event (N = 18)
 - contamination, frequency varied from 1 time per week to less often than 1 time per year (13 of 18)
 - loss of material, frequency varied from 1 time per year to less often than 1 time per year (2 of 18)
 - leaking source, frequency of less often than 1 time per year (1 of 18)
 - spill, frequency less often than 1 time per year (2 of 18)

1.36 SYSTEM 35: MANUFACTURING OF SOURCES CONTAINING LIQUIDS

- 1. Estimated percentage of workers receiving doses at various levels (N = 10):
 - 49% < 50 mrem/yr
 - 84% < 500 mrem/yr
 - 97% < 1000 mrem/yr
 - 3% > 1000 mrem/yr

2. Responses to questions about safety under various conditions.

Table 1.71Modal Selections on Questions Related to the Safety of
Manufacturing of Sources Containing Liquids Under Various
Conditions (Ns = 20 to 23)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe, 50%	Very unsafe, 39%
Off-normal (barrier failure)	Very unsafe, 40%	Somewhat unsafe, 48%

Table 1.72Median Selections on Questions Related to the Safety of
Manufacturing of Sources Containing Liquids Under Various
Conditions (Ns = 20 to 23)

	With Current Regulations	Without Current Regulations
Normal (barriers intact)	Somewhat safe	Somewhat unsafe
Off-normal (barrier failure)	Somewhat unsafe	Somewhat unsafe

- 3. Responses to question about most frequent non-reportable event (N = 17)
 - contamination, frequency unknown (11 of 17)
 - loss of material, frequency unknown (1 of 17)
 - spills, frequency unknown (5 of 17)

1.37 SYSTEM 36: MANUFACTURING OF SOURCES CONTAINING GASES

- 1. Estimated percentage of workers receiving doses at various levels (N = 6):
 - 54% < 50 mrem/yr
 - 87% < 500 mrem/yr
 - 95% < 1000 mrem/yr
 - 5% > 1000 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.73Modal Selections on Questions Related to the Safety of
Manufacturing of Sources Containing Gases Under Various
Conditions (Ns = 18 to 21)

	With Current Regulations	Without Current Regulations				
Normal (barriers intact)	Somewhat safe, 63%	Somewhat safe, 48%				
Off-normal (barrier failure)	Somewhat safe, 44%	Very unsafe, 38%				

Table 1.74Median Selections on Questions Related to the Safety of
Manufacturing of Sources Containing Gases Under Various
Conditions (Ns = 18 to 21)

	With Current Regulations	Without Current Regulations				
Normal (barriers intact)	Somewhat safe	Somewhat unsafe				
Off-normal (barrier failure)		Somewhat unsafe				
	unsafe					

- 3. Responses to question about most frequent non-reportable event (N = 10)
 - contamination, frequency varied from 1 time per year to less often than 1 time per year (4 of 10)
 - leak, frequency varied from 1 time per quarter to less often than 1 time per year (3 of 10)
 - loss of material, frequency of 1 time per year (1 of 10)
 - spill, frequency of less often than 1 time per year (1 of 10)
 - uptake, frequency of 1 time per year (1 of 10)

1.38 SYSTEM 37: INCINERATION OF WASTE

- 1. Estimated percentage of workers receiving doses at various levels (N = 19):
 - 70% < 50 mrem/yr
 - 100% < 500 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.75Modal Selections on Questions Related to the Safety of Incineration
of Waste Under Various Conditions (Ns = 25 to 27)

	With Current Regulations	Without Current Regulations				
Normal (barriers intact)	Somewhat safe, 48%	Somewhat safe, 42%				
Off-normal (barrier failure)	Somewhat safe, 48%	Somewhat unsafe, 39%				

Table 1.76Median Selections on Questions Related to the Safety of Incineration
of Waste Under Various Conditions (Ns = 25 to 27)

	With Current Regulations	Without Current Regulations				
Normal (barriers intact)	Somewhat safe	Somewhat safe				
Off-normal (barrier failure)	Somewhat safe	Somewhat unsafe				

- 3. Responses to question about most frequent non-reportable event (N = 13)
 - contamination, frequency varied from 1 time per week to 1 time per year (5 of 13)
 - leak, frequency of 1 time per year (1 of 13)
 - loss of material, frequency of less often than 1 time per year (1 of 13)
 - device malfunction/failure, frequency varied from 1 time per year to less often than 1 time per year (2 of 13)
 - wrong material, frequency varied from 1 time per month to less often than 1 time per year (4 of 13)

1.39 SYSTEM 38: COMPACTING OF WASTE

- 1. Estimated percentage of workers receiving doses at various levels (N = 21):
 - 50% < 50 mrem/yr
 - 99% < 500 mrem/yr
 - 100% < 1000 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.77Modal Selections on Questions Related to the Safety of Compacting
of Waste Under Various Conditions (Ns = 25 to 28)

	With Current Regulations	Without Current Regulations				
Normal (barriers intact)	Somewhat safe, 57%	Somewhat unsafe, 44%				
Off-normal (barrier failure)	Somewhat safe, 48%	Somewhat safe, 48%				

Table 1.78Median Selections on Questions Related to the Safety of Compacting
of Waste Under Various Conditions (Ns = 25 to 28)

	With Current Regulations	Without Current Regulations				
Normal (barriers intact)	Somewhat safe	Somewhat unsafe				
Off-normal (barrier failure)	Somewhat safe	Somewhat unsafe				

- 3. Responses to question about most frequent non-reportable event (N = 16)
 - contamination, frequency varied from 1 time per week to 1 time per year (9 of 16)
 - exposure, frequency of 1 time per year (1 of 16)
 - leak, frequency varied from 1 time per year to less often than 1 time per year (3 of 16)
 - spill, frequency varied from 1 time per quarter to 1 time per year (2 of 16)
 - uptake, frequency of 1 time per year (1 of 16)

1.40 SYSTEM 39: PACKAGING OF WASTE

- 1. Estimated percentage of workers receiving doses at various levels (N = 29):
 - 45% < 50 mrem/yr
 - 96% < 500 mrem/yr
 - 99% < 1000 mrem/yr
 - 1% > 1000 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.79Modal Selections on Questions Related to the Safety of Packaging of
Waste Under Various Conditions (Ns = 24 to 28)

	With Current Regulations	Without Current Regulations				
Normal (barriers intact)	Somewhat safe, 46%	Somewhat safe, 48%				
Off-normal (barrier failure)	Somewhat safe, 58%	Somewhat unsafe, 44%				

Table 1.80Median Selections on Questions Related to the Safety of Packaging
of Waste Under Various Conditions (Ns = 24 to 28)

	With Current Regulations	Without Current Regulations				
Normal (barriers intact)	Somewhat safe	Somewhat safe				
Off-normal (barrier failure)	Somewhat safe	Somewhat unsafe				

- 3. Responses to question about most frequent non-reportable event (N = 14)
 - contamination, frequency varied from 1 time per week to 1 time per year (11 of 14)
 - spills, frequency varied from 1 time per quarter to 1 time per year (2 of 14)
 - transportation incident, frequency of less often than 1 time per year (1 of 14)

1.41 SYSTEM 40: SOLIDIFICATION OF WASTE

- 1. Estimated percentage of workers receiving doses at various levels (N = 7):
 - 34% < 50 mrem/yr
 - 100% < 500 mrem/yr
- 2. Responses to questions about safety under various conditions.

Table 1.81Modal Selections on Questions Related to the Safety of Solidification
of Waste Under Various Conditions (Ns = 19 to 22)

	With Current Regulations	Without Current Regulations				
Normal (barriers intact)	Very safe, 46%	Somewhat safe, 53%				
Off-normal (barrier failure)	Somewhat safe, 45%	Somewhat unsafe, 50%				

Table 1.82Median Selections on Questions Related to the Safety of
Solidification of Waste Under Various Conditions (Ns = 19 to 22)

	With Current Regulations	Without Current Regulations			
Normal (barriers intact)	Somewhat safe	Somewhat safe			
Off-normal (barrier failure)	Somewhat safe/somewhat unsafe	Somewhat unsafe			

- 3. Responses to question about most frequent non-reportable event (N = 8)
 - contamination, frequency varied from 1 time per week to 1 time per year (5 of 8)
 - device malfunction/failure, frequency of 1 time per year (1 of 8)
 - spill, frequency varied from 1 time per quarter to 1 time per year (2 of 8)

1.42 SYSTEM 41A: NUCLEAR LAUNDRIES

- 1. Estimated percentage of workers receiving doses at various levels (N = 1):
 - 0 % < 50 mrem/yr
 - 100% < 500 mrem/yr

1.43 SYSTEM 41B: DECONTAMINATION SERVICES

- 1. Estimated percentage of workers receiving doses at various levels (N = 1):
 - 0% < 50 mrem/yr
 - 10% < 500 mrem/yr
 - 80% < 1000 mrem/yr
 - 10% > 1000 mrem/yr

Table 2.1Survey Results: Nuclear Byproduct Material Systems Rank Ordered
With Respect To Mean Annual Estimated Dose to Workers in Millirem
For Comparison With Modal and Median Dose Estimates And With
Responses Related To Perceived Safety Under Various Conditions.

	Question 1					"Safety" Modal Selection				"Safety" Median Selection			
System Number	Operation	mean* est. annual worker dose (mrem)	modal est. annual worker dose	median est. annual worker dose	question 3	question 4	question 5	question 6	question 3	question 4	question 5	question 6	
41b	decontamination services	785	501-1000	501-1000									
22	radiography - field use	482	201-500	201-500	SS	vu	vu	vu	ss	vu	vu	vu	
34	manufacturing of sources containing solids	362	ND-50	101-200	SS	vu	vu	vu	S S	su	su	su	
16	nuclear pharmacies	355	101-200	101-200	SS	su	su	vu	SS	su	su	su/vu	
5	10 CFR 35.200 - nuclear medicine with generator(s)	294	201-500	101-200	ss	su	SS	su	SS	su	su	su	
21	radiography - permanent installation	262	ND-50	101-200	SS	su	su	vu	SS	su	su	vu	
35	manufacturing of sources containing liquids	236	ND-50	51-100	SS	vu	vu	su	SS	su	su	su	
9	brachytherapy - manual afterloading	231	ND-50	51-100	SS	su	vu	vu	SS	su	su	vu	
36	manufacturing of sources containing gases	223	ND-50	ND-50	SS	SS	SS	vu	SS	ss/su	su	su	
7	10 CFR 35.300 - nuclear medicine	211	101-200	101-200	SS	su	su	su	SS	su	su	su	
41a	nuclear laundries	210	101-200	101-200									
19	well logging - tracers and field flood studies	171	201-500	51-100	SS	ss/su	ss/su	su	SS	su	su	su	
33	manufacturing or distribution of devices containing sealed sources	167	<nd< td=""><td>ND-50</td><td>SS</td><td>su</td><td>SS</td><td>vu</td><td>85</td><td>su</td><td>su</td><td>su</td></nd<>	ND-50	SS	su	SS	vu	85	su	su	su	
6	10 CFR 35.200 - nuclear medicine without a generator	155	101-200	101-200	vs	SS	SS	su	vs	SS	SS	su	
8	brachytherapy using seeds	154	51-100	51-100	SS	su	su	vu	SS	su	su	su	

			Question	n 1	"Safety" Modal Selection				"Saf			
System Number	Operation	mean* est. annual worker dose (mrem)	modal est. annual worker dose	median est. annual worker dose	question 3	question 4	question 5	question 6	question 3	question 4	question 5	question 6
20	well logging - using sealed sources	135	ND-50	51-100	SS	SS	su	vu	ss	su	su	su
39	packaging of waste	129	ND-50	51-100	SS	SS	SS	su	88	SS	ss	su
17	veterinary use	125	ND-50	51-100	SS	SS	SS	su	88	SS	ss	su
40	solidification of waste	111	ND-50	51-100	vs	ss	SS	su	SS	ss/su	ss	su
4	10 CFR 35.100 - nuclear medicine and human use research	102	101-200	51-100	vs	SS	SS	su	vs	SS	SS	S S
10	brachytherapy - low dose rate remote afterloading	91	ND-50	ND-50	S S	su	su	vu	SS	su	su	su/vu
38	compacting of waste	89	ND-50	ND-50 / 51-100	SS	SS	SS	su	SS	SS	SS	su
15	gamma stereotactic surgery	88	ND-50	ND-50	vs/ss	vu	su	vu	88	su/vu	su	vu
11	brachytherapy - high dose rate remote afterloading	76	ND-50	ND-50	SS	vu	vu	vu	SS	su	su	vu
1	R&D synthesis laboratories	66	<nd< td=""><td>ND-50</td><td>vs</td><td>SS</td><td>SS</td><td>su</td><td>vs/ss</td><td>ss</td><td>ss</td><td>su</td></nd<>	ND-50	vs	SS	SS	su	vs/ss	ss	ss	su
23	pool irradiators	65	ND-50	ND-50	vs	vu	vu	vu	SS	su	su	vu
18	R&D on animals	63	ND-50	ND-50	vs/ss	SS	SS	SS	SS	ss	ss	ss/su
27	portable gauges	58	ND-50	ND-50	vs/ss	ss	SS	su	vs/ss	ss	ss	su
12	brachytherapy - eye applicator	56	ND-50	ND-50	vs	su	ss/vu	su	SS	su	su	su
14	teletherapy devices	56	<nd< td=""><td>ND-50</td><td>ss</td><td>vu</td><td>su</td><td>vu</td><td>SS</td><td>su/vu</td><td>su</td><td>vu</td></nd<>	ND-50	ss	vu	su	vu	SS	su/vu	su	vu
37	incineration of waste	44	ND-50	ND-50	SS	ss	SS	su	SS	ss	ss	su
13	10 CFR 35.400 - diagnostic devices	42	<nd< td=""><td>ND-50</td><td>vs</td><td>SS</td><td>SS</td><td>SS</td><td>vs</td><td>SS</td><td>SS</td><td>SS</td></nd<>	ND-50	vs	SS	SS	SS	vs	SS	SS	SS
28	x-ray fluorescence devices	27	<nd< td=""><td><nd< td=""><td>vs</td><td>ss</td><td>ss</td><td>vs/ss</td><td>vs</td><td>ss</td><td>ss</td><td>SS</td></nd<></td></nd<>	<nd< td=""><td>vs</td><td>ss</td><td>ss</td><td>vs/ss</td><td>vs</td><td>ss</td><td>ss</td><td>SS</td></nd<>	vs	ss	ss	vs/ss	vs	ss	ss	SS
2	R&D laboratories using carbon, hydrogen, iodine, phosphorus, and sulfur	26	<nd< td=""><td>ND-50</td><td>vs</td><td>SS</td><td>SS</td><td>SS</td><td>vs</td><td>SS</td><td>SS</td><td>su</td></nd<>	ND-50	vs	SS	SS	SS	vs	SS	SS	su
13a	10 CFR 35.500 - diagnostic devices	25	ND-50	ND-50	vs	SS	SS	vs	vs	SS	SS	SS

			Question	1	''Safe	ety" Mo	dal Sele	ction		ety'' Me Selection		
System Number	Operation	mean* est. annual worker dose (mrem)	modal est. annual worker dose	median est. annual worker dose	question 3	question 4	question 5	question 6	question 3	question 4	question 5	question 6
31	small sealed sources or devices (e.g., those used under a general license)	21	<nd< td=""><td><nd< td=""><td>vs</td><td>SS</td><td>vs</td><td>vs</td><td>vs</td><td>SS</td><td>SS</td><td>SS</td></nd<></td></nd<>	<nd< td=""><td>vs</td><td>SS</td><td>vs</td><td>vs</td><td>vs</td><td>SS</td><td>SS</td><td>SS</td></nd<>	vs	SS	vs	vs	vs	SS	SS	SS
25	fixed gauges - gamma emitters	20	<nd< td=""><td><nd< td=""><td>vs</td><td>S8</td><td>S8</td><td>SS</td><td>vs</td><td>SS</td><td>SS</td><td>su</td></nd<></td></nd<>	<nd< td=""><td>vs</td><td>S8</td><td>S8</td><td>SS</td><td>vs</td><td>SS</td><td>SS</td><td>su</td></nd<>	vs	S 8	S 8	SS	vs	SS	SS	su
24	self-shielded irradiators	13	<nd< td=""><td><nd< td=""><td>vs</td><td>SS</td><td>SS</td><td>SS</td><td>vs</td><td>SS</td><td>SS</td><td>SS</td></nd<></td></nd<>	<nd< td=""><td>vs</td><td>SS</td><td>SS</td><td>SS</td><td>vs</td><td>SS</td><td>SS</td><td>SS</td></nd<>	vs	SS	SS	SS	vs	SS	SS	SS
26	fixed gauges - beta emitters	11	<nd< td=""><td><nd< td=""><td>vs</td><td>SS</td><td>SS</td><td>SS</td><td>vs</td><td>SS</td><td>SS</td><td>SS</td></nd<></td></nd<>	<nd< td=""><td>vs</td><td>SS</td><td>SS</td><td>SS</td><td>vs</td><td>SS</td><td>SS</td><td>SS</td></nd<>	vs	SS	SS	SS	vs	SS	SS	SS
30	other measuring devices	11	<nd< td=""><td><nd< td=""><td>vs</td><td>SS</td><td>SS</td><td>SS</td><td>vs</td><td>SS</td><td>SS</td><td>SS</td></nd<></td></nd<>	<nd< td=""><td>vs</td><td>SS</td><td>SS</td><td>SS</td><td>vs</td><td>SS</td><td>SS</td><td>SS</td></nd<>	vs	SS	SS	SS	vs	SS	SS	SS
3	in vitro laboratory testing	9	<nd< td=""><td><nd< td=""><td>vs</td><td>vs</td><td>vs</td><td>SS</td><td>vs</td><td>vs</td><td>vs/ss</td><td>ss</td></nd<></td></nd<>	<nd< td=""><td>vs</td><td>vs</td><td>vs</td><td>SS</td><td>vs</td><td>vs</td><td>vs/ss</td><td>ss</td></nd<>	vs	vs	vs	SS	vs	vs	vs/ss	ss
29	gas chromatographs	6	<nd< td=""><td><nd< td=""><td>vs</td><td>vs</td><td>vs</td><td>vs</td><td>vs</td><td>vs</td><td>vs</td><td>vs</td></nd<></td></nd<>	<nd< td=""><td>vs</td><td>vs</td><td>vs</td><td>vs</td><td>vs</td><td>vs</td><td>vs</td><td>vs</td></nd<>	vs	vs	vs	vs	vs	vs	vs	vs
32	very small sealed sources of devices (e.g., those used under an exemption)	5	<nd< td=""><td><nd< td=""><td>vs</td><td>vs</td><td>vs</td><td>vs</td><td>vs</td><td>vs</td><td>vs</td><td>vs</td></nd<></td></nd<>	<nd< td=""><td>vs</td><td>vs</td><td>vs</td><td>vs</td><td>vs</td><td>vs</td><td>vs</td><td>vs</td></nd<>	vs	vs	vs	vs	vs	vs	vs	vs

Question 3: Normal operating conditions, current regulations.

Question 4: Off-normal operating conditions, current regulations.

Question 5: Normal operating conditions, without current regulations.

Question 6: Off-normal operating conditions, without current regulations

Codes: vs = very safe ss = somewhat safe su = somewhat unsafe vu = very unsafe

*The review group recognized that, in calculating means using the unequal class intervals for dose provided to the respondents, low dose estimates received less weight than high dose estimates.

While this was recognized as reducing the value of the mean as an indicator of the annual dose to workers, it was judged to be "close enough" for developing a "ballpark" ranking of systems for comparison with other survey results.

Table 3.1Each Respondent's Definition of "Very Safe," "Somewhat Safe,""Somewhat Unsafe," and "Very Unsafe"

Respondent Number	Very Safe	Somewhat Safe	Somewhat Unsafe	Very Unsafe
1	Individual probably will not receive recordable dose	Individual probably will receive recordable dose - 2.5 R	Individual will receive 2.5 R - 5R	Prob. of overexposure is high
2	No harm possible	No permanent/noticeable harm	Not life threatening	Life threatening
3	Can be unregulated	Not much danger to users	Possibility of overexposures and personnel contamination	Possibility of injuries to personnel
4	Inherently safe, little need for regulation, worst case scenario nothing to lose sleep over	Need to exercise some controls, can receive regulatory significant exposure but operator would have to have to completely drop the ball	Can significantly expose however safety systems in place rather than depend on human compliance with procedures	Very dependent on strict compliance with safety procedures to provide safety, when deviations from compliance occur, actual potential for significant exposures, including death
5	No harm to public or employees as long as procedures are followed	Public is safe but puts employees at risk	Both public and employees are at risk	Harm to both public and employees
6	No exposure	Some exposure	More exposure	Over exposure
7	<nd< td=""><td><nd 20="" mrem<="" td="" to=""><td>21 mRem to 50 mRem</td><td>> 50 mRem</td></nd></td></nd<>	<nd 20="" mrem<="" td="" to=""><td>21 mRem to 50 mRem</td><td>> 50 mRem</td></nd>	21 mRem to 50 mRem	> 50 mRem
8	0 - Low probability of biological risk to occupational workers and/or general public	Low to medium probability of biological risk to occupational workers and/or general public	medium to high probability of biological risk to occupational workers and/or general public	High + probability of biological risk to occupational workers and/or general public
9	Within occupational radiation exposure limit, adequately trained employees, strong oversite, compliance with all regs	Small potential to possibility of adverse health effects, substantial compliance with reg, within occupational exposure limits	Could exceed exposure limits, lack of supervision, lack of training	Exceeds exposure limits, lack of control of radioactive material, loss of material, no training of personnel

Respondent Number	Very Safe	Somewhat Safe	Somewhat Unsafe	Very Unsafe
10	Very low doses & little contamination, I considered the health risk to be minimal	A greater possibility of exposure to workers but still unlikely	Likely to have higher exposures/contaminatio n but only if licensee does not follow procedures	High probability of contamination or exposure
11	No health effect	Minimal health effect	Possible minor health effect	Possible major health effect
12	no definition provided	no definition provided	no definition provided	no definition provided
13	With minimal exposure to any individual	Low probability of any unusual or high exposures to any individual	Possibility of an unnecessary or high exposure to any individual	Moderate to high probability of an unnecessary of high exposure to any individual
14	Fool proof	Not likely to result in health impacts, low exposure, less than 500 mR	May cause high exposure up to 2 rem	Likely to receive exposures or uptakes above 2 rem
15	Very little threat to public health & safety, very little threat to occupational safety	A small threat to occupational safety, very little threat to public health & safety	Threat to occupational safety, somewhat of a (or a possible) threat to public health & safety	A threat to occupational safety, a threat to public health and safety
16	Exposures to workers & public not likely to be > 100 mrem/year under normal operations	Potential for public member to receive a dose > 100 mrem/year	Potential for workers to receive a dose of > 500 mrem/yr.	Potential for injury to worker and/or public (rad. burns, death, injury) if significant controls not in place
17	Little or no chance of exposure > 50 mrem	Exposure between 50 - 100 mrem	Exposure between 100 - 500 mrem public exposure potential injury	Exposure > 500 mrem damage to property public exposure potential injury and/or death
18	Very little potential of radiation exposure	Potential of exposure < 200 mrem/year (W.B.)	Potential of exposure > 200 mrem/year (W.B)	Potential of > 5000 mrem/yr. (W.B.)
19	Exposures to workers and public not normally likely to exceed 100 mrem/year under normal circumstances	Potential for public exposure to exceed 100 mrem/year if not controlled projects - workers normally required to be monitored for exposure (1.e. > 500 mrem/year likely)	Potential for worker exposures to exceed 5 rem/year absent proper controls	Potential for harm (radiation burns, organ impairment, etc.) from radiation exposure if significant controls not implemented

Respondent Number	Very Safe	Somewhat Safe	Somewhat Unsafe	Very Unsafe
20	No impact on worker safety, even in accident situation, very unlikely workers or public to receive dose	As above [to the left] except during accident situation worker could possibly receive small doses [with] no effect to public	Potential for dose to workers during normal operations & certainly during accident situations	Highly probable that worker could receive dose during normal operations & potential for exposure to public if operations are not strictly controlled
21	Very safe if there is no chance of significant exposure/contaminatio n occurring	Somewhat safe if there is only a small chance of significant exposure/contaminatio n occurring	Somewhat unsafe if there is a moderate chance of significant exposure/contamination occurring	Very unsafe if it is likely that significant exposure/contaminatio n may occur
22	Little or no rad. exposure above background	Some chance of exposure, but below threshold for acute effects	Chance of significant acute effects (e.g., loss of fingers in some radiography exposures)	lethal
23	Little or no radiological dose to individuals	Radiological dose measurable but probably less than 100 mrem	Radiological dose greater than public limit but less than worker limit	Radiological dose approaches or exceeding worker limit (*from a risk standpoint, none of the operations would pose a significant risk)
24	No significant or likely safety consequence little to no potential for occurrence	Some potential likely not significant	greater potential could be significant	Significant safety consequence high potential of occurrence
25	Would cause no one to receive a dose in excess of 5 rem to the whole body, 50 rem to an extremity, etc.	Would cause one person to receive a dose in excess of 5 rem every few years	Would cause one or two people per year to receive doses in excess of 5 rem	Would cause several people per year to receive doses in excess of 5 rem
26	Adequate controls in place to keep exposures ALARA, meet below public dose limits, meet and follow regs, have procedures in place that are adequate to protect public health and safety	Have adequate procedures, meet intent of regs	Inadequate procedures, inadequate controls, meet intent of regs	None of the above [to left]

Respondent Number	Very Safe	Somewhat Safe	Somewhat Unsafe	Very Unsafe
27	Minimum chance of any radiation exposure under any circumstance	Slight to moderate probability of some radiation exposure; but not exceeding regulatory limits	Moderate to high probability of some exposure to radiation slight chance of exceeding regulatory limits	High probability of excessive radiation exposure; slight to high possibility of life threatening or damaging radiation exposure
28	No risk of radiation exposure	Slight potential for exposure or contamination	greater potential for exposure	high risk for exposure
29	No risk of radiation exposure if device or RAM is used correctly (to operator, user or public)	Limited risk of radiation exposure if device or RAM is used correctly (operator, user or public)	Minimal risk of radiation exposure if device or RAM is used correctly (operator, user or public)	Unnecessary risk of radiation exposure if device or RAM is used correctly (operator, user or public)
30	Chance of incident low to non-existent, lowest of activities, exposure rates, minimal to no handling considerations	Mod. to low chance of inc., small act./exp., minimal handling	Real probability to mod., medium activity/exp. (mCi-Ci), daily handling	High chance for inc., high act./exp. (Ci- MCi), daily handling w/ daily handling - tools only
31	Safe "no matter what happens"	Could result in loss of material control w/ very low consequence	Could result in loss of material control with minor consequence	If control of material is lost would probably result in real public hazard
32	No or little chance of radiological consequences	Consequences of event not likely to result in exposure in excess of part 20 limits	Consequences of event likely to significantly to result in exposure sufficient to result in some physiological damage (i.e., chromosomal)	Consequences of event likely to
33	Very little chance of exposure or contamination during operations, even with error by operator/user	Safe during normal operations, small chance of exposure/contaminatio n, User can create hazard by not following procedures or bypassing safety features - even with this, operator not likely to be seriously hurt	Safe during normal operations, but any change in procedures or error by operator can create hazard, safeguards not in place of poor	Operations unsafe at any level.

Respondent Number	Very Safe	Somewhat Safe	Somewhat Unsafe	Very Unsafe
34	Virtually no dose to users or public	Less that 100 mrem to public annually, less than 500 mrem to users annually	Greater than doses above [to the left] in "b"	nonstochastic effects possible
35	no definition provided	no definition provided	no definition provided	no definition provided
36	Whole body exposure/internal exposure/exposure to lens of eye, etc. <10% of established limits	Annual exposures to personnel do not exceed 25% of any limit	Reasonable potential for exceeding an exposure limit if situation is not corrected in a timely fashion	High probability of an overexposure occurring if situation is not corrected very quickly (within an hour)
37	In a worst case scenario the possibility of injury or adverse health effects are remote.	In the case of an incident or accident the possibility of an injury or adverse health effects are unlikely.	In the case of an incident or accident an injury or adverse health effects are possible.	In the case of and incident or accident an injury or adverse health effects are likely and without normal operating conditions and regulatory controls injury and adverse health effects are possible.
38	no definition provided	no definition provided	no definition provided	no definition provided
39	No or very little chance for radiation exposure, internal nor external in excess of 50 mR over normal background.	Chance for exposure to personnel that is or can be 2 to 5 times normal background.	Excessive radiation exposure that can or will cause physical effects but are undetectable.	Personnel exposures that can cause or does cause physical effects from radiation exposure.
40	small chance of failure, low significance of exposure, well controlled program	middling chance of failures of process, chance of exposure <500mRem per incident, controlled program.	process/equipment failure whether from design or abuse, lack of concern by employees, no real management support.	Personnel uncooperative, cavalier, equipment contains large sources which can be exposed to personnel. no management support for safety. Bottom line — get the job done.
41	Even without good controls in place and work practices the material use is safe	With good controls in place and good work practices contamination or dose could occur through carelessness or accident.	material amount or use could be dangerous without close attention to practices & controls.	Inherently dangerous due to amount/material unless controls & practices are rigorously implemented & enforced.

4 RESPONSES TO QUESTIONS ABOUT REGULATORY DECISION-MAKING

Table 4.1Responses to Questions Concerning About Regulatory Agencies
Should Make Decisions

	Very Important	Important	Not Important	Should not be Considered
Consensus Opinion of the Public	0	12	15	9
Financial Burden of Regulation to the Licensee	1	23	9	3
Financial Burden of Regulation to the Public	2	19	13	2
Evaluation of Radiological Risk	36	0	0	0
Benefit of the Use of Material to Society	18	18	1	0
Other (supplied by respondents):				
Opinion of Licensees, Their Societies and Standards Organizations	0	1	0	0
Historical Data (licensee compliance)	0	1	0	0
NRC Efficiency/Capability @ Task (considers limited resources - personnel, budget)	0	1	0	0
Generation of Long-lived Waste	0	1	0	0
Generation of Mixed Waste	0	1	0	0
Manpower of Regulator	0	0	1	0
Burden Imposed vs Risk Averted (risk of harm & financial risk)	1	0	0	0
Public Participation - to the extent that public feels that they are being adequately protected, because in reality the are being adequately protected	1	0	0	0

Appendix A

Questionnaire


Questionnaire


The survey administered to the NRC and agreement States materials licensing and inspection personnel appears on the following pages.

APPENDIX A

E

	UNITED STATES NUCLEAR REGULATORY COMMISSION WASHINGTON, D.C. 20555-0001
MEMORANDUM TO:	A. Randolph Blough, Director Division of Nuclear Materials Safety, Region I
	Douglas M. Collins, Director Division of Nuclear Materials Safety, Region II
	Cynthia D. Pederson, Director Division of Nuclear Materials Safety, Region III
	Ross A. Scarano, Director Division of Nuclear Materials Safety, Region IV
FROM:	Frederick C. Combs, Acting Director Division of Industrial and Medical Nuclear Safety, NMSS
SUBJECT:	SURVEY BY THE NUCLEAR BYPRODUCT MATERIAL RISK REVIEW GROUP
	Division of Industrial and Medical Nuclear Safety has formed a nuclear review working group composed of NRC employees and an employee o. The group's goals are to identify and document the technical basis fo
of the State of Colorad a risk-informed approa graded approach to reg has obtained the servio technical work necessa	ch to nuclear byproduct material regulation and to dorship product material based on risk information. The working group ses of a contractor, SCIENTECH, Inc., to perform the majority of the ary to meet those goals.
of the State of Colorad a risk-informed approa graded approach to reg has obtained the servic technical work necessa The information resour reports, the experience members of the regula believes that informatio goals and that, collectio unparalleled breadth a working group has dev involved in licensing a	ch to nuclear byproduct material regulation and to do to by planta group gulation of that material based on risk information. The working group ces of a contractor, SCIENTECH, Inc., to perform the majority of the

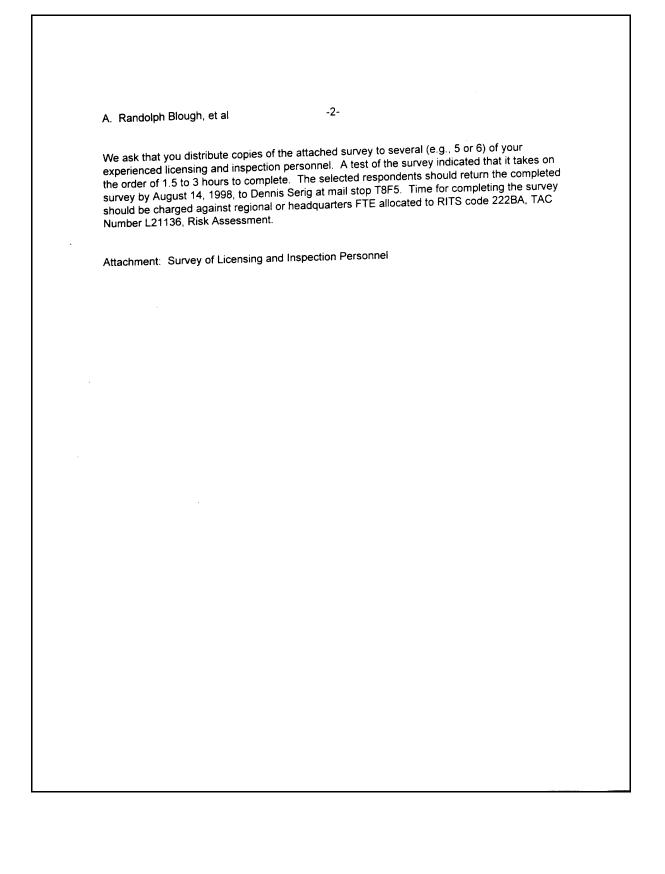


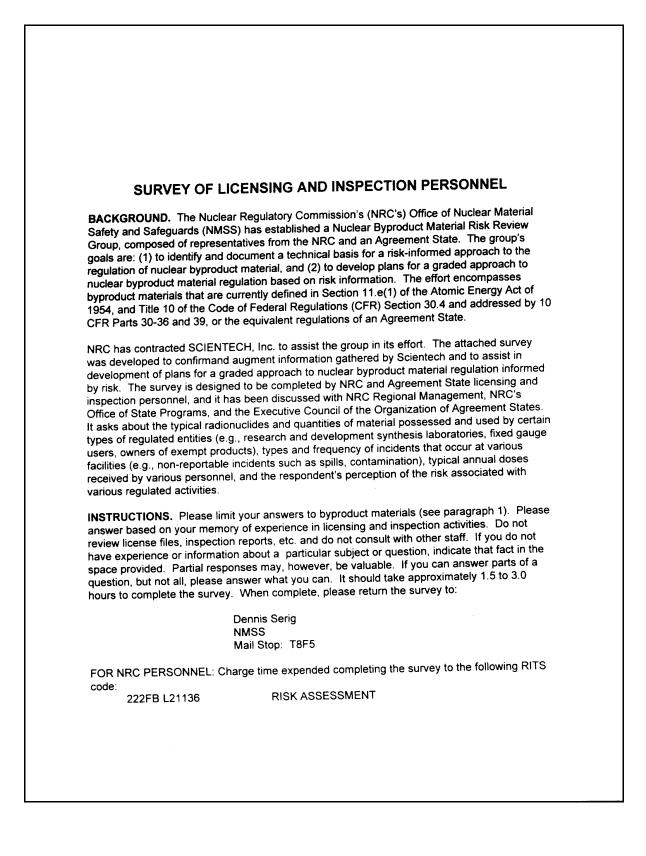

NUCLEAR REQUIND	NUCLEAR REGU	TED STATES JLATORY COMM TON, D.C. 20555-0001	IISSION
****	July	23, 1998	
ALL AGREEMENT OHIO, OKLAHOM	S STATES A, PENNSYLVANIA		
TRANSMITTAL OF	STATE AGREEMENTS	PROGRAM INFOR	RMATION (SP-98-065)
Your attention is in	vited to the enclosed corre	espondence which	contains:
INCIDENT	ND EVENT INFORMATI	ON	
PROGRAM	MANAGEMENT INFORM	ATION	
TRAINING	OURSE INFORMATION		
TECHNICAL	INFORMATION		
OTHER INF	ORMATION	xx	REQUESTED RESPONSE TO SURVEY
Commission's Office byproduct material r of the State of Color a risk-informed appr graded approach to encompasses bypro Energy Act of 1954, addressed by 10 CF The working group h	of Nuclear Material Safe isk review working group ado. The group's goals a oach to nuclear byproduc regulation of that materia duct materials that are cu and Title 10 of the Code R Parts 30-36 and 39, or	ety and Safeguards composed of NRC are to identify and d t material regulatio I based on risk info urrently defined in S of Federal Regulati the equivalent regu of a contractor, SC	employees and an employee locument the technical basis for n and to develop plans for a
reports, the experient members of the reg information beyond collectively, nuclear and depth of knowled developed a survey and inspection of m	ice and training of its owr ulated community to a we hat available to SCIENTE material licensing and ins dge about the systems of for distribution to NRC ar aterials within the scope of	n staff and consulta b page survey. Th ECH will be valuable pection personnel f interest. As a result of Agreement State of its review (enclos	largely limited to published ints, and the responses of e review group believes that e in meeting its goals and that, have an unparalleled breadth ult, the working group has e personnel involved in licensing red). The intent is to capture nd confirm information provided
			of the survey to several (e.g., test of the survey indicated that

Γ

- 2 -SP-98-065 completed survey by August 14, 1998, to the individual named below. Any questions concerning the survey may be directed to Dr. Serig. U.S. Nuclear Regulatory Commission ATTN: Dennis I. Serig Mail Stop T8F5 Washington, D.C. 20555-0001 Phone: 301-415-7901 Fax: 301-415-5369 E-Mail: dis@nrc.gov This information request has been approved by OMB 3150-0029, expiration April 30, 2001. The estimated burden per response to comply with this voluntary collection is 1.5-3.0 hours. Forward any comments regarding the burden estimate to the Information and Records Management Branch (T-6 F33), U.S. Nuclear Regulatory Commission, Washington, DC 20555-0001, and to the Paperwork Reduction Project (3150-0029), Office of Management and Budget, Washington, DC 20503. If a document does not display a currently valid OMB control number, the NRC may not conduct or sponsor, and a person is not required to respond to a collection of information. Λ Paul H. Lohaus, Deputy Director Office of State Programs Enclosure: As stated

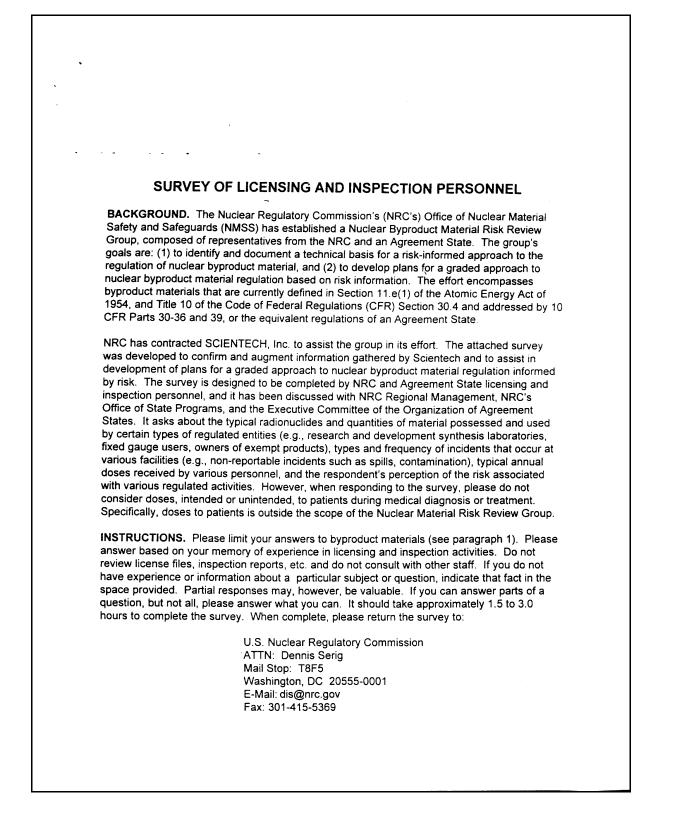

Section 1 - Questions About All Types of Operations

1. Based on your experience, indicate the percentage of workers that **typically** receive annual whole-body doses in the indicated ranges for each type of operation listed below under current regulations and policies for licensing and inspection. Percentages in each row should sum to 100. Mark an X in the "don't know" column if you're unfamiliar with the operation.

ND = NON-DETECTABLE

Operation	< ND	ND to 50 mrem	51 to 100 mrem	101 to 200 mrem	201 to 500 mrem	501 to 1000 mrem	> 1000 mrem	don't know
R&D synthesis laboratories								
R&D laboratories using carbon, hydrogen, iodine, phosphorus, and sulfur								
in vitro laboratory testing								
10 CFR 35.100 - nuclear medicine and human use research								
10 CFR 35.200 - nuclear medicine with generator(s)								
10 CFR 35.200 - nuclear medicine without a generator								
10 CFR 35.300 - nuclear medicine								
brachytherapy - using seeds								
brachytherapy - manual afterloading								
brachytherapy - low dose rate remote afterloading								
brachytherapy - high dose rate remote afterloading								
brachytherapy - eye applicator								
10 CFR 35.400 - diagnostic devices								
teletherapy devices								
gamma stereotactic surgery								
nuclear pharmacies								
veterinary use								
R&D on animals								
well logging - tracers and field flood studies								
well logging - using sealed sources								
radiography - permanent installation								
radiography - field use								
pool irradiators								

Operation	< ND	ND to 50 mrem	51 to 100 mrem	101 to 200 mrem	201 to 500 mrem	501 to 1000 mrem	> 1000 mrem	don't know
self-shielded irradiators								
fixed gauges - gamma emitters								
fixed gauges - beta emitters								
portable gauges								
x-ray fluorescence devices								
gas chromatographs								
other measuring devices								
small sealed sources or devices (e.g. those used under a general license)								
very small sealed sources or devices (e.g., those used under an exemption)								
manufacturing or distribution of devices containing sealed sources								
manufacturing of radioactive solids								
manufacturing of radioactive liquids								
manufacturing of radioactive gases								
incineration of waste								
compacting of waste								
packaging of waste								
solidification of waste								
other Part 30 operation (describe each):								

2. Based on your experience, specify in the space provided what you believe to be the non-reportable incident (e.g., spill, contamination, loss of material) that is most frequent for each type of operation listed below under current regulations and policies for licensing and inspection. Once you have specified an incident, mark an X in the column that is your best estimate of the frequency of that incident per licensee. Mark an X in the "don't know" column if you're unfamiliar with the operation.

Operation	Most Frequent Type of Incident	1 time /week	1 time /month	1 time /quarter	1 time /year	less often	don't know
R&D synthesis laboratories							
R&D laboratories using carbon, hydrogen, iodine, phosphorus, and sulfur							
in vitro laboratory testing							
10 CFR 35.100 - nuclear medicine and human use research							
10 CFR 35.200 - nuclear medicine with generator(s)							
10 CFR 35.200 - nuclear medicine without a generator							
10 CFR 35.300 - nuclear medicine							
brachytherapy - using seeds							
brachytherapy - manual afterloading							
brachytherapy - low dose rate remote afterloading							
brachytherapy - high dose rate remote afterloading							
brachytherapy - eye applicator							
10 CFR 35.400 - diagnostic devices							
teletherapy devices							
gamma stereotactic surgery							
nuclear pharmacies							
veterinary use							
R&D on animals							
well logging - tracers and field flood studies							
well logging - using sealed sources							
radiography - permanent installation							
radiography - field use							
pool irradiators							
self-shielded irradiators							
fixed gauges - gamma emitters							

Operation	Most Frequent Type of Incident	1 time /week	1 time /month	1 time /quarter	1 time /year	less often	don't know
fixed gauges - beta emitters							
portable gauges							
x-ray fluorescence devices							
gas chromatographs							
other measuring devices							
small sealed sources or devices (e.g. those used under a general license)							
very small sealed sources or devices (e.g., those used under an exemption)							
manufacturing or distribution of devices containing sealed sources							
manufacturing of radioactive solids							
manufacturing of radioactive liquids							
manufacturing of radioactive gases							
incineration of waste							
compacting of waste							
packaging of waste							
solidification of waste							
other Part 30 operation (describe each):							

3. Based on your experience, indicate what you believe to be the radiological safety of each type of operation listed below <u>under **normal operating conditions and current**</u> <u>regulations and policies for licensing and inspection</u>. Mark an X in the column that is your best estimate. Mark an X in the "don't know" column if you're unfamiliar with the operation.

Operation	very safe	somewhat safe	somewhat unsafe	very unsafe	don't know
R&D synthesis laboratories					
R&D laboratories using carbon, hydrogen, iodine, phosphorus, and sulfur					
in vitro laboratory testing					
10 CFR 35.100 - nuclear medicine and human use research					
10 CFR 35.200 - nuclear medicine with generator(s)					
10 CFR 35.200 - nuclear medicine without a generator					
10 CFR 35.300 - nuclear medicine					
brachytherapy - using seeds					
brachytherapy - manual afterloading					
brachytherapy - low dose rate remote afterloading					
brachytherapy - high dose rate remote afterloading					
brachytherapy - eye applicator					
10 CFR 35.400 - diagnostic devices					
teletherapy devices					
gamma stereotactic surgery					
nuclear pharmacies					
veterinary use					
R&D on animals					
well logging - tracers and field flood studies					
well logging - using sealed sources					
radiography - permanent installation					
radiography - field use					
pool irradiators					
self-shielded irradiators					
fixed gauges - gamma emitters					
fixed gauges - beta emitters					
portable gauges					
x-ray fluorescence devices					
gas chromatographs					
other measuring devices					

Operation	very safe	somewhat safe	somewhat unsafe	very unsafe	don't know
small sealed sources or devices (e.g. those used under a general license)					
very small sealed sources or devices (e.g., those used under an exemption)					
manufacturing or distribution of devices containing sealed sources					
manufacturing of radioactive solids					
manufacturing of radioactive liquids					
manufacturing of radioactive gases					
incineration of waste					
compacting of waste					
packaging of waste					
solidification of waste					
other Part 30 operation (describe each):					

4. Based on your experience, indicate what you believe to be the radiological safety of each type of operation listed below <u>under off-normal operating conditions</u> (e.g., incidents, accidents, failure of administrative controls) and current regulations and policies for <u>licensing and inspection</u>. Mark an X in the column that is your best estimate. Mark an X in the "don't know" column if you're unfamiliar with the operation.

Operation	very safe	somewhat safe	somewhat unsafe	very unsafe	don't know
R&D synthesis laboratories					
R&D laboratories using carbon, hydrogen, iodine, phosphorus, and sulfur					
in vitro laboratory testing					
10 CFR 35.100 - nuclear medicine and human use research					
10 CFR 35.200 - nuclear medicine with generator(s)					
10 CFR 35.200 - nuclear medicine without a generator					
10 CFR 35.300 - nuclear medicine					
brachytherapy - using seeds					
brachytherapy - manual afterloading					
brachytherapy - low dose rate remote afterloading					
brachytherapy - high dose rate remote afterloading					
brachytherapy - eye applicator					
10 CFR 35.400 - diagnostic devices					
teletherapy devices					
gamma stereotactic surgery					
nuclear pharmacies					
veterinary use					
R&D on animals					
well logging - tracers and field flood studies					
well logging - using sealed sources					
radiography - permanent installation					
radiography - field use					
pool irradiators					
self-shielded irradiators					
fixed gauges - gamma emitters					
fixed gauges - beta emitters					
portable gauges					
x-ray fluorescence devices					
gas chromatographs					
other measuring devices					

Operation	very safe	somewhat safe	somewhat unsafe	very unsafe	don't know
small sealed sources or devices (e.g. those used under a general license)					
very small sealed sources or devices (e.g., those used under an exemption)					
manufacturing or distribution of devices containing sealed sources					
manufacturing of radioactive solids					
manufacturing of radioactive liquids					
manufacturing of radioactive gases					
incineration of waste					
compacting of waste					
packaging of waste					
solidification of waste					
other Part 30 operation (describe each):					

5. Based on your experience, indicate what you believe to be the radiological safety of each type of operation listed below <u>under normal operating conditions</u>, but <u>without current</u> <u>regulations and policies for licensing and inspection</u>. Mark an X in the column that is your best estimate. Mark an X in the "don't know" column if you're unfamiliar with the operation.

Operation	very safe	somewhat safe	somewhat unsafe	very unsafe	don't know
R&D synthesis laboratories					
R&D laboratories using carbon, hydrogen, iodine, phosphorus, and sulfur					
in vitro laboratory testing					
10 CFR 35.100 - nuclear medicine and human use research					
10 CFR 35.200 - nuclear medicine with generator(s)					
10 CFR 35.200 - nuclear medicine without a generator					
10 CFR 35.300 - nuclear medicine					
brachytherapy - using seeds					
brachytherapy - manual afterloading					
brachytherapy - low dose rate remote afterloading					
brachytherapy - high dose rate remote afterloading					
brachytherapy - eye applicator					
10 CFR 35.400 - diagnostic devices					
teletherapy devices					
gamma stereotactic surgery					
nuclear pharmacies					
veterinary use					
R&D on animals					
well logging - tracers and field flood studies					
well logging - using sealed sources					
radiography - permanent installation					
radiography - field use					
pool irradiators					
self-shielded irradiators					
fixed gauges - gamma emitters					
fixed gauges - beta emitters					
portable gauges					
x-ray fluorescence devices					
gas chromatographs					
other measuring devices					

Operation	very safe	somewhat safe	somewhat unsafe	very unsafe	don't know
small sealed sources or devices (e.g. those used under a general license)					
very small sealed sources or devices (e.g., those used under an exemption)					
manufacturing or distribution of devices containing sealed sources					
manufacturing of radioactive solids					
manufacturing of radioactive liquids					
manufacturing of radioactive gases					
incineration of waste					
compacting of waste					
packaging of waste					
solidification of waste					
other Part 30 operation (describe each):					

6. Based on your experience, indicate what you believe to be the radiological safety of each type of operation listed below <u>under off-normal operating conditions (e.g., incidents, accidents, failure of administrative controls)</u> but without current regulations and policies for licensing and inspection. Mark an X in the column that is your best estimate. Mark an X in the "don't know" column if you're unfamiliar with the operation.

Operation	very safe	somewhat safe	somewhat unsafe	very unsafe	don't know
R&D synthesis laboratories					
R&D laboratories using carbon, hydrogen, iodine, phosphorus, and sulfur					
in vitro laboratory testing					
10 CFR 35.100 - nuclear medicine and human use research					
10 CFR 35.200 - nuclear medicine with generator(s)					
10 CFR 35.200 - nuclear medicine without a generator					
10 CFR 35.300 - nuclear medicine					
brachytherapy - using seeds					
brachytherapy - manual afterloading					
brachytherapy - low dose rate remote afterloading					
brachytherapy - high dose rate remote afterloading					
brachytherapy - eye applicator					
10 CFR 35.400 - diagnostic devices					
teletherapy devices					
gamma stereotactic surgery					
nuclear pharmacies					
veterinary use					
R&D on animals					
well logging - tracers and field flood studies					
well logging - using sealed sources					
radiography - permanent installation					
radiography - field use					
pool irradiators					
self-shielded irradiators					
fixed gauges - gamma emitters					
fixed gauges - beta emitters					
portable gauges					
x-ray fluorescence devices					
gas chromatographs					
other measuring devices					

Operation	very safe	somewhat safe	somewhat unsafe	very unsafe	don't know
small sealed sources or devices (e.g. those used under a general license)					
very small sealed sources or devices (e.g., those used under an exemption)					
manufacturing or distribution of devices containing sealed sources					
manufacturing of radioactive solids					
manufacturing of radioactive liquids					
manufacturing of radioactive gases					
incineration of waste					
compacting of waste					
packaging of waste					
solidification of waste					
other Part 30 operation (describe each):					

- 7. Describe your criteria for the following terms as used in the above questions:
 - a. "very safe"

b. "somewhat safe"

c. "somewhat unsafe"

d. "very unsafe"

Section 2 - Questions Concerning Specific Operations

8. Questions 8.1 through 8.4 pertain to gamma emitting byproduct material in fixed gauges and small calibrators. If you are not familiar with the use of these types of devices, mark an X in the box below and skip to question 9.

 \Box Not familiar

8.1 The following table lists isotopes and ranges of quantities that might be used in <u>fixed</u> <u>gamma gauges and small calibrators</u>. Please mark an X in the appropriate column indicating whether, based on your knowledge, you agree or disagree that the information is correct. If you disagree, please indicate why in the comment area. If you believe additional isotopes should be considered, please add them to the table with their appropriate quantity range.

Isotope	Range of Quantity	Agree	Disagre e	Comment
Am-241	12 mCi to 6 Ci			
Ba-133	10 mCi to 125 mCi			
Cd-109	50 mCi to 300 mCi			
Co-60	30 μ Ci to 100 Ci			
Cs-137	10 μ Ci to 110 Ci			
Fe-55	2 mCi to 350 mCi			

8.2 Please rate the importance of the following barriers to worker and public dose as they apply to <u>fixed gamma gauges and small calibrators</u> (1 is the most important and 4 is the least important).

Barrier	Rating
Training, knowledge, and experience of personnel in radiation safety principles.	
Training, knowledge, and experience of personnel in handling and use of the gauge or calibrator.	
Limits on the quantity of byproduct material that is incorporated in gauges and calibrators.	
Inherent safety features in the design of the gauges or calibrators.	
Typical installation of gauges in locations that are not usually accessible to workers or the public.	

8.3 Many licensees implement "good practices" when using and handling byproduct material. "Good practices" are actions that are not specifically required by the regulations but may be included as license conditions or performed voluntarily to reduce exposures or the likelihood of accidents. Based on your experience, indicate the percentage (0 to 100) of all users of <u>fixed gamma gauges and small calibrators</u> that you believe follow the "good practices" indicated below. Mark every box. Use an X if you are unsure of a percentage.

Good Practice	Percentage
Posting signs indicating the presence of radioactive material and advising people not to frequent the area.	
Restricting access to the gauge or calibrator by use of locks or other physical barriers.	
Training workers in the importance of appropriate handling of the gauge or calibrator.	
Auditing workers and operations to ensure activities are carried out in an appropriate manner.	
Performing periodic inventories to verify accountability of the gauge or calibrator.	
Other (please specify):	

8.4 Please rate the importance of the following regulatory controls as they are, or could be, used to regulate <u>fixed gamma gauges and small calibrators</u>. Consider exposures during normal operations, incidents (including both the probability of occurrence and consequences of those incidents), and costs of regulation to NRC/Agreement States and licensees in your rating (1 is the most important and 4 is the least important).

Regulatory Controls				Rating
Preapproval revie	ew of licensee's know	ledge and training a	and experience of personnel.	
Preapproval of lic	censee's radiation saf	fety program.		
Preapproval of pr	rocedures for the safe	e use of the materia		
Preapproval of facilities and operations.				
Preapproval of the equipment (sealed sources and devices) used during operations.				
On-site inspections of the licensees facility and operations to verify safety and compliance at the following frequency (mark your recommended frequency below and rate the importance of your selection in the box at the right):				
□ every year □ every 2 years □ every 3 years □ every 5 years				
□ other (specify):				

Regulatory Controls					Rating
Mail or telephone inspections to verify safety and compliance at the following frequency (mark your recommended frequency below and rate the importance of your selection in the box at the right):					
□ every year	□ every 2 years	□ every 3 years □	□ evei	ry 5 years	
□ other (specify): _					
	our recommended fre	ccountability of radioact equency below and rate			
every year	every 2 years	□ every 3 years □	□ evei	ry 5 years	
□ other (specify): _					
	our recommended fre	ountability of radioactive equency below and rate			
□ every year □ every 2 years □ every 3 years □ every 5 years					
□ other (specify):					
Periodic telephone inspections verify accountability of radioactive material at the following frequency (mark your recommended frequency below and rate the importance of your selection in the box at the right):					
every year	every 2 years	□ every 3 years □	□ evei	ry 5 years	
other (specify):					
		an independent invent		on-site inspections	
		t State cross check of th iodic (rate each selectic		mail inspections	
in the box to it's rig	nt):		f	telephone inspections	
		nt inventory of users'		on-site inspections	
		e inventory with users by n in the box to it's right)		mail inspections	
telephone inspections					
No regulatory controls should be placed on fixed gamma gauges and small calibrators.					
Other (please spec	ify):				

9. Questions 9.1 through 9.4 pertain to <u>byproduct material in portable gauges</u>. If you are not familiar with the use of these types of devices, mark an X in the box below and skip to question 10.

 \Box Not familiar

9.1 The following table lists isotopes that might be used in <u>portable gauges</u>. Please indicate what you believe to be the typical quantity, or range of quantities, of each used in portable gauges. If, based on your experience, you disagree that a particular isotope is actually used in portable gauges, mark an X in the "disagree" column and indicate why in the comment area. If you believe additional isotopes should be considered, please add them to the table with their appropriate quantity or range of quantities.

Isotope	Typical Quantity	Disagre e	Comment
Am-241			
Ba-133			
Cd-109			
Co-60			
Cs-137			
Fe-55			
Gd-153			
I-125			

9.2 Please rate the importance of the following barriers to worker and public dose as they apply to <u>portable gauges</u> (1 is the most important and 4 is the least important).

Barrier	Rating	
Training, knowledge, and experience of personnel in radiation safety principles.		
Training, knowledge, and experience of personnel in handling and use of the portable gauge.		
Limits on the quantity of byproduct material that is incorporated in portable gauges.		
Inherent safety features in the design of portable gauges.		
Securing of portable gauges in locked areas when not in use or maintaining constant surveillance of portable gauges.		

9.3 Many licensees implement "good practices" when using and handling byproduct material. "Good practices" are actions that are not specifically required by the regulations but may be included as license conditions or performed voluntarily to reduce exposures or the likelihood of accidents. Based on your experience, indicate the percentage (0 to 100) of all users of <u>portable gauges</u> that you believe implement the "good practices" indicated below. Mark every box. Use an X if you are unsure of a percentage.

Good Practice	Percentage
Posting signs indicating the presence of radioactive material and advising people not to frequent the area.	
Restricting access to the portable gauge by use of locks or other physical barriers.	
Training workers in the importance of appropriate handling of the portable gauge.	
Auditing workers and operations to ensure activities are carried out in an appropriate manner.	
Performing periodic inventories to verify accountability of the portable gauge.	
Other (please specify):	

9.4 Please rate the importance of the following regulatory controls as they are, or could be, used to regulate <u>portable gauges</u>. Consider exposures during normal operations, incidents (including both the probability of occurrence and consequences of those incidents), and costs of regulation to NRC/Agreement States and licensees in your rating (1 is the most important and 4 is the least important).

Regulatory Controls			Rating	
Preapproval review	w of licensee's know	ledge and training a	and experience of personnel.	
Preapproval of lice	ensee's radiation saf	ety program.		
Preapproval of pro	ocedures for the safe	e use of the material		
Preapproval of fac	ilities and operation	S.		
Preapproval of the equipment (sealed sources and devices) used during operations.				
On-site inspections of the licensees facility and operations to verify safety and compliance at the following frequency (mark your recommended frequency below and rate the importance of your selection in the box at the right):				
□ every year □ every 2 years □ every 3 years □ every 5 years				
□ other (specify):				

Regulatory Controls				
Mail or telephone inspections to verify safety and compliance at the following frequency (mark your recommended frequency below and rate the importance of your selection in the box at the right):				
□ every year □ every 2 years □ every 3 years □ every	ery 5 years			
□ other (specify):				
Periodic on-site inspections to verify accountability of radioactive r frequency (mark your recommended frequency below and rate the selection in the box at the right):				
□ every year □ every 2 years □ every 3 years □ every	ery 5 years			
□ other (specify):				
Periodic mail inspections to verify accountability of radioactive material at the following frequency (mark your recommended frequency below and rate the importance of your selection in the box at the right):				
□ every year □ every 2 years □ every 3 years □ every	ery 5 years			
□ other (specify):				
Periodic telephone inspections to verify accountability of radioactive material at the following frequency (mark your recommended frequency below and rate the importance of your selection in the box at the right):				
□ every year □ every 2 years □ every 3 years □ every	ery 5 years			
□ other (specify):				
NRC/Agreement State maintenance of an independent inventory	on-site inspections			
of users' material and NRC/Agreement State cross check of the inventory with users by performing periodic (rate each selection	mail inspections			
in the box to it's right):	telephone inspections			
Vendor maintenance of an independent inventory of users'	on-site inspections			
material and vendor cross check of the inventory with users by performing periodic (rate each selection in the box to it's right):				
telephone inspections				
No regulatory controls should be placed on portable gauges.				
Other (please specify):				

10. Questions 10.1 through 10.4 pertain to <u>laboratory operations using unsealed byproduct</u> <u>material</u>. If you are not familiar with such operations, mark an X in the box below and skip to question 11.

\Box Not familiar.

10.1 The following table lists isotopes and typical quantities that might be used in <u>laboratory</u> <u>operations using unsealed byproduct material</u>. Please mark an X in the appropriate column indicating whether, based on your knowledge, you agree or disagree that the information is correct. If you disagree, please indicate why in the comment area. If you believe additional isotopes should be considered, please add them to the table with their appropriate quantity.

Isotope	Typical Quantity	Agree	Disagre e	Comment
C-14	5 mCi			
Ca-45	1 mCi			
Cr-51	10 mCi			
Fe-59	1 mCi			
H-3	25 mCi			
I-125	10 mCi			
P-32	10 mCi			
P-33	10 mCi			
S-35	15 mCi			

10.2 Please rate the importance of the following barriers to worker and public dose as they apply to <u>laboratory operations using unsealed materials</u> (1 is the most important and 4 is the least important).

Barrier	Rating
Training, knowledge, and experience of personnel in radiation safety principals.	
Training, knowledge, and experience of personnel in handling and use of unsealed radioactive materials in a laboratory setting.	
Most laboratory use of unsealed byproduct material is with low-energy beta-emitters such as C-14, H-3, P-32, and S-35, and sometime other radionuclides, which are easily shielded.	
Most laboratory use of unsealed byproduct material involves small quantities (microcuries to a few millicuries) that is usually in a non-volatile form.	
Persons handling unsealed byproduct material in laboratories usually wear protective gloves and laboratory coats.	
Access to the unsealed byproduct material is controlled by physical security, or by maintaining visual oversight.	

10.3 Many licensees implement "good practices" when using and handling byproduct material. "Good practices" are actions that are not specifically required by the regulations but may be included as license conditions or performed voluntarily to reduce exposures or the likelihood of accidents. Based on your experience, indicate the percentage (0 to 100) of all persons performing <u>laboratory operations using unsealed material</u> that you believe implement the "good practices" indicated below. Mark every box. Use an X if unsure of a percentage.

Good Practice	Percentage
Wearing protective gloves, laboratory coats, or other protective clothing.	
Using shielding (e.g., around stock vials and storage areas, portable shields in work areas).	
Using hoods or glove boxes if potentially volatile materials are handled.	
Perform surveys for radiation and contamination after each use or the end of each day of use.	
Maintaining an inventory of unsealed byproduct material in the laboratory.	
Auditing work areas and maintenance of records by Radiation Safety Officer or management.	
Other (please specify):	

10.4 Please rate the importance of the following regulatory controls as they are, or could be, used to regulate <u>laboratory operations using unsealed material</u>. Consider exposures during normal operations, incidents (including both the probability of occurrence and consequences of those incidents), and costs of regulation to NRC/Agreement States and licensees in your rating (1 is the most important and 4 is the least important).

Regulatory Controls	Rating
Preapproval review of licensee's knowledge and training and experience of personnel.	
Preapproval of licensee's radiation safety program.	
Preapproval of procedures for the safe use of the material.	
Preapproval of facilities and operations.	
Preapproval of the equipment (sealed sources and devices) used during operations.	

Regulatory Controls			
On-site inspections of the licensees facility and operations to verify safety and compliance at the following frequency (mark your recommended frequency below and rate the importance of your selection in the box at the right):			
□ every year □ every 2 years □ every 3 years □ every	ery 5 years		
other (specify):			
Mail or telephone inspections to verify safety and compliance at the (mark your recommended frequency below and rate the important the box at the right):			
□ every year □ every 2 years □ every 3 years □ every	ery 5 years		
other (specify):			
Periodic on-site inspections to verify the persons' accountability of the following frequency (mark your recommended frequency below importance of your selection in the box at the right):			
□ every year □ every 2 years □ every 3 years □ every	ery 5 years		
other (specify):			
Periodic mail inspections to verify the persons' accountability of radioactive material at the following frequency (mark your recommended frequency below and rate the importance of your selection in the box at the right):			
□ every year □ every 2 years □ every 3 years □ every	ery 5 years		
□ other (specify):			
Periodic telephone inspections to verify accountability of radioactive material at the following frequency (mark your recommended frequency below and rate the importance of your selection in the box at the right):			
□ every year □ every 2 years □ every 3 years □ every	ery 5 years		
□ other (specify):			
NRC/Agreement States maintenance of an independent	on-site inspections		
inventory of the users' material and NRC/Agreement State cross check of the inventory with users by performing periodic (rate mail inspecti			
each selection in the box to it's right):	telephone inspections		
Vendor maintenance of an independent inventory of the users' on-site inspections			
material and the vendor cross check of the inventory with users by performing periodic (rate each selection in the box to it's mail inspections			
right): telephone inspections			
No regulatory controls should be placed on laboratory operations using unsealed material.			

Regulatory Controls		
	ory Controls	ory Controls

11. Questions 11.1 through 11.4 pertain to <u>packaging byproduct material waste</u>. If you are not familiar with such operations, mark an X in the box below and skip to question 12.

 \Box Not familiar.

11.1 The following table lists isotopes that might be involved in <u>packaging byproduct material</u> <u>waste</u>. Please indicate what you believe to be the typical quantity of each in the packaging of byproduct material waste. If, based on your experience, you disagree that a particular isotope is actually involved in the packaging of byproduct material waste, mark an X in the "disagree" column and indicate why in the comment area. If you believe additional isotopes should be considered, please add them to the table with their appropriate quantity.

Isotope	Typical Quantity	Disagre e	Comment
Ac-225			
Ag-110m			
Am-241			
Au-195			
Ba-133			
Ba-140			
C-14			
Ca-45			
Cd-109			
Cf-252			
Ce-141			
Ce-144			
CI-36			
Co-58			
Co-60			
Cr-51			
Cs-134			

Isotope	Typical Quantity	Disagre e	Comment
Cs-137			
Eu-152			
Fe-55			
Fe-59			
Gd-153			
H-3			
I-125			
I-129			
I-131			
lr-192			
Kr-85			
La-140			
Mn-54			
Nb-95			
Ni-59			
Ni-63			
P-32			
P-33			
Pa-234			
Pb-210			
Pm-147			
Po-210			
Rb-86			
Ru-103			
Ru-106			
S-35			
Sb-124			
Sb-125			
Sc-46			
Se-75			
Sn-113			

Isotope	Typical Quantity	Disagre e	Comment
Sr-85			
Sr-89			
Sr-90			
Tc-99			
Tc-99m			
TI-204			
Xe-131m			
Xe-133			
Y-90			
Zn-65			
Zr-95			

11.2 Please rate the importance of the following barriers to worker and public dose as they apply to <u>packaging byproduct material waste</u> (1 is the most important and 4 is the least important).

Barrier	Rating
Training, knowledge, and experience of personnel in radiation safety principals.	
Limiting operations to sealed sources.	
Limiting operations to small quantities of byproduct material.	
Wearing protective gloves and other types of protective clothing when handling unsealed byproduct material.	
Controlling access to byproduct material through physical security or by maintaining visual oversight.	

11.3 Many licensees implement "good practices" when using and handling byproduct material. "Good practices" are actions that are not specifically required by the regulations but may be included as license conditions or performed voluntarily to reduce exposures or the likelihood of accidents. Based on your experience, indicate the percentage (0 to 100) of all <u>packagers of byproduct material waste</u> that you believe implement the "good practices" indicated below. Mark every box. Use an X if unsure of a percentage.

Good Practice	Percentage
Wearing protective gloves or other protective clothing.	

Using shielding (e.g., around stock vials and storage areas, portable shields in work areas).	
Using hoods or glove boxes if potentially volatile materials are handled.	
Performing surveys for radiation and contamination after handling unsealed material or at the end of each work day.	
Performing periodic inventories of all byproduct material at the facility.	
Auditing work areas and maintenance of records by Radiation Safety Officer or management.	
Other (please specify):	

11.4 Please rate the importance of the following regulatory controls as they are, or could be, used to regulate <u>packaging byproduct material waste</u>. Consider exposures during normal operations, incidents (including both the probability of occurrence and consequences of those incidents), and costs of regulation to NRC/Agreement States and licensees in your rating. (1 is the most important and 4 is the least important).

Regulatory Controls	Rating
Preapproval review of licensee's knowledge and training and experience of personnel.	
Preapproval of licensee's radiation safety program.	
Preapproval of procedures for the safe use of the material.	
Preapproval of facilities and operations.	
Preapproval of the equipment (sealed sources and devices) used during operations.	
On-site inspections of the licensees facility and operations to verify safety and compliance at the following frequency (mark your recommended frequency below and rate the importance of your selection in the box at the right): every year □ every 2 years □ every 3 years □ every 5 years other (specify):	
Mail or telephone inspections to verify safety and compliance at the following frequency (mark your recommended frequency below and rate the importance of your selection in the box at the right): every year	

Periodic on-site inspections to verify the persons' accountability of radioactive material at the following frequency (mark your recommended frequency below and rate the importance of your selection in the box at the right):					
every year	every 2 years	□ every 3 years	□ eve	ery 5 years	
□ other (specify): _					
Periodic mail inspections to verify the persons' accountability of radioactive material at the following frequency (mark your recommended frequency below and rate the importance of your selection in the box at the right):					
every year	□ every 2 years	□ every 3 years	□ eve	ery 5 years	
□ other (specify):					
Periodic telephone inspections to verify the persons' accountability of radioactive material at the following frequency (mark your recommended frequency below and rate the importance of your selection in the box at the right):					
□ every year □ every 2 years □ every 3 years □ every 5 years					
other (specify):					
NRC/Agreement State maintenance of an independent inventory on-site inspections of users' material and NRC/Agreement State cross check of the					
inventory with user	s by performing perio	odic (rate each selecti		mail inspections	
in the box to it's right):				telephone inspections	
		t inventory of the user		on-site inspections	
		inventory with users t n in the box to it's right		mail inspections	
				telephone inspections	
No regulatory controls should be placed on packaging byproduct material waste.					
Other (please spec	;ify):				

12. Questions 12.1 through 12.4 pertain to use of byproduct material in a <u>nuclear medicine</u> <u>department</u>. If you are not familiar with such operations, mark an X in the box below and skip to question 13.

 $\hfill\square$ Not familiar.

12.1 The following table lists isotopes and typical quantities that might be used in a <u>nuclear</u> <u>medicine department</u>. Please mark an X in the appropriate column indicating whether, based on your knowledge, you agree or disagree that the information is correct. If you disagree, please indicate why in the comment area. In cases where a quantity is not stated, please indicate what you believe to be the typical quantity used in a nuclear

medicine department. If you believe additional isotopes should be considered, please add them to the table with their appropriate quantity.

Isotope	Range of Quantity	Agree	Disagre e	Comment
Au-198	100 to 140 mCi			
Dy-165				
Er-169				
Ho-166				
I-131	3 to 300 mCi			
Mo-99	2 Ci			
P-32	2.3 to 22.3 mCi			
Pd-109				
Re-186	25 to 35 mCi			
Sm-153				
Sn-117m				
Sr-89	1 to 10.8 mCi			
Tc-99m	50 mCi to 2 Ci			
Xe-133	10 to 100 mCi			
Y-90				

12.2 Please rate the importance of the following barriers to worker and public dose as they apply to use of byproduct material in a <u>nuclear medicine department</u> (1 is the most important and 4 is the least important).

Barrier	Rating
Training, knowledge, and experience of personnel in radiation safety principals.	
Training, knowledge, and experience of personnel in handling and use of byproduct material in a nuclear medicine department that may include use of a generator.	
Most byproduct material used in a nuclear medicine department that may include use of a generator have short half-lives.	
Most byproduct material, used in a nuclear medicine department that may include use of a generator is in a non-volatile form, in quantities ranging from microcuries to tens of millicuries.	

Persons handling byproduct material in a nuclear medicine department that may include use of a generator usually wear protective gloves and laboratory coats.

Access to the byproduct material in a nuclear medicine department that may include use of a generator is controlled by physical security, or by maintaining visual oversight.

12.3 Many licensees implement "good practices" when using and handling byproduct material. "Good practices" are actions that are not specifically required by the regulations but may be included as license conditions or performed voluntarily to reduce exposures or the likelihood of accidents. Based on your experience, indicate the percentage (0 to 100) of all persons performing <u>nuclear medicine operations</u> that you believe implement the "good practices" indicated below. Mark every box. Use an X if unsure of a percentage.

Good Practice	Percentage
Wearing protective gloves, laboratory coats, or other protective clothing.	
Using shielding (syringe shields, L-blocks, etcetera).	
Using hoods or glove boxes if potentially volatile materials are handled.	
Using long-handled tools when handling large-activity vials.	
Performing surveys for radiation and contamination after each use or at the end of each day of use.	
Maintaining an inventory of byproduct material in the nuclear medicine department that may include use of a generator.	
Isolating injected patients from other patients and members of the public.	
Auditing work areas and maintenance of records by Radiation Safety Officer or management.	
Other (please specify):	

12.4 Please rate the importance of the following regulatory controls as they are, or could be, used to regulate <u>nuclear medicine departments</u>. Consider exposures during normal operations, incidents (including both the probability of occurrence and consequences of those incidents), and costs of regulation to NRC/Agreement States and licensees in your rating (1 is the most important and 4 is the least important).

Regulatory Controls	Rating
Preapproval review of licensee's knowledge and training and experience of personnel.	
Preapproval of licensee's radiation safety program.	
Preapproval of procedures for the safe use of the material.	
Preapproval of facilities and operations.	

Regulatory Controls				
Preapproval of the equipment (sealed sources and devices) used during operations.				
On-site inspections of the licensees facility and operations to verify safety and compliance at the following frequency (mark your recommended frequency below and rate the importance of your selection in the box at the right):				
□ every year □ every 2 years □ every 3 years □ every	ery 5 years			
□ other (specify):				
Mail or telephone inspections to verify safety and compliance at the (mark your recommended frequency below and rate the importance the box at the right):				
□ every year □ every 2 years □ every 3 years □ every	ery 5 years			
□ other (specify):				
Periodic on-site inspections to verify the person's accountability of the following frequency (mark your recommended frequency below importance of your selection in the box at the right):				
□ every year □ every 2 years □ every 3 years □ every	ery 5 years			
□ other (specify):				
Periodic mail inspections to verify the persons' accountability of radioactive material at the following frequency (mark your recommended frequency below and rate the importance of your selection in the box at the right):				
□ every year □ every 2 years □ every 3 years □ every 5 years				
other (specify):				
Periodic telephone inspections to verify the persons' accountability of radioactive material at the following frequency (mark your recommended frequency below and rate the importance of your selection in the box at the right):				
□ every year □ every 2 years □ every 3 years □ every 5 years				
□ other (specify):				
NRC/Agreement State maintenance of an independent inventory on-site inspections of users' material and NRC/Agreement State cross check of the				
inventory with users by performing periodic (rate each selection	mail inspections			
in the box to it's right):	telephone inspections			
Vendor maintenance of an independent inventory of users'	on-site inspections			
material and vendor cross check of the inventory with users by performing periodic (rate each selection in the box to it's right):	mail inspections			
	telephone inspections			

Regulatory Controls	Rating
No regulatory controls should be placed on nuclear medicine departments that may include use of a generator.	
Other (please specify):	

13. Questions 13.1 through 13.4 pertain to <u>manufacturers or distributors of gaseous sources</u> containing byproduct material. If you are not familiar with such operations, mark an X in the box below and skip to question 14.

 \Box Not familiar.

13.1 The following table lists isotopes and typical quantities that might be used by <u>manufacturers or distributors of gaseous sources</u> containing byproduct material. Please mark an X in the appropriate column indicating whether, based on your knowledge, you agree or disagree that the information is correct. If you disagree, please indicate why in the comment area. In cases where a quantity is not stated, please indicate what you believe to be the typical quantity used by manufacturers/distributors of gaseous sources containing byproduct material. If you believe additional isotopes should be considered, please add them to the table with their appropriate quantity.

Isotope	Quantity	Agree	Disagre e	Comment
Br-82				
H-3	1 to 25 Ci			
Kr-85	up to 25 μCi			
Xe-133				

13.2 Please rate the importance of the following barriers to worker and public dose as they apply to manufacturers or distributors of gaseous sources (1 is the most important and 4 is the least important).

Barrier	Rating
Training, knowledge, and experience of personnel in radiation safety principals.	
Training, knowledge, and experience of personnel in manufacture of gaseous sources of byproduct material.	
Most manufacturers/distributors of gaseous sources of byproduct material handle H-3, a low-energy beta-emitter or noble gases such as Kr-85 and Xe-133.	

APPENDIX A

Barrier	Rating
Using remote handling systems for transfer of gaseous byproduct material during the manufacture of gaseous sources of byproduct material.	
Air monitoring in facilities which manufacture gaseous sources of byproduct material.	
Controlling access to the byproduct material in a facility which manufactures gaseous sources of byproduct material by physical security, or by maintaining visual oversight.	

13.3 Many licensees implement "good practices" when using and handling byproduct material. "Good practices" are actions that are not specifically required by the regulations but may be included as license conditions or performed voluntarily to reduce exposures or the likelihood of accidents. Based on your experience, indicate the percentage (0 to 100) of all <u>manufacturers or distributors of gaseous sources</u> that you believe implement the "good practices" indicated below. Mark every box. Use an X if unsure of a percentage.

Good Practice	Percentage
Wearing protective gloves, laboratory coats, or other protective clothing.	
Using shielding (e.g., around storage areas, or portable shields in work areas).	
Using hoods, glove boxes, hot cells, or other remote-handling systems during handling of gaseous byproduct material.	
Performing surveys for radiation and airborne byproduct material during each day of use.	
Maintaining an inventory of unsealed byproduct material in the laboratory.	
Auditing work areas and maintenance of records by Radiation Safety Officer or management.	

APPENDIX A		
	Good Practice	Percentage
Other (please specify):		

13.4 Please rate the importance of the following regulatory controls as they are, or could be, used to regulate <u>manufacturers or distributors of gaseous sources</u> containing byproduct material. Consider exposures during normal operations, incidents (including both the probability of occurrence and consequences of those incidents), and costs of regulation to NRC/Agreement States and licensees in your rating. (1 is the most important and 4 is the least important).

Regulatory Controls	Rating
Preapproval review of licensee's knowledge and training and experience of personnel.	
Preapproval of licensee's radiation safety program.	
Preapproval of procedures for the safe use of the material.	
Preapproval of facilities and operations.	
Preapproval of the equipment (sealed sources and devices) used during operations.	
On-site inspections of the licensees facility and operations to verify safety and compliance at the following frequency (mark your recommended frequency below and rate the importance of your selection in the box at the right):	
□ every year □ every 2 years □ every 3 years □ every 5 years	
other (specify):	
Mail or telephone inspections to verify safety and compliance at the following frequency (mark your recommended frequency below and rate the importance of your selection in the box at the right):	
□ every year □ every 2 years □ every 3 years □ every 5 years	
other (specify):	
Periodic on-site inspections to verify the persons' accountability of radioactive material at the following frequency (mark your recommended frequency below and rate the importance of your selection in the box at the right):	
□ every year □ every 2 years □ every 3 years □ every 5 years	
□ other (specify):	
Periodic mail inspections to verify the persons' accountability of radioactive material at the following frequency (mark your recommended frequency below and rate the importance of your selection in the box at the right):	
□ every year □ every 2 years □ every 3 years □ every 5 years	
other (specify):	

Periodic telephone inspections to verify the persons' accountability material at the following frequency (mark your recommended frequency the importance of your selection in the box at the right):	
□ every year □ every 2 years □ every 3 years □ every	ery 5 years
□ other (specify):	
NRC/Agreement State maintenance of an independent inventory of users' material and NRC/Agreement State cross check of the	on-site inspections
inventory with users by performing periodic (rate each selection	mail inspections
in the box to it's right):	telephone inspections
Vendor maintenance of an independent inventory of users'	on-site inspections
material and vendor cross check of the inventory with users by performing periodic (rate each selection in the box to it's right):	mail inspections
	telephone inspections
No regulatory controls should be placed manufacturers or distribut sources.	tors of gaseous
Other (please specify):	

Section 3 - Questions Concerning How You Think Regulatory Agencies Should Make Decisions

14. Indicate what you believe is the level of importance of the factors that might be considered in regulating manufacturing, distribution, receipt, possession, use, handling, transfer, and disposal of radioactive materials. Rank each factor according to the following scale: 1 - very important; 2 - important; 3 - not important; 4 - should not be considered. Please list under "other" any additional factors that should be considered.

Regulation of Persons Possessing Material Should Be Based On:	
Consensus opinion of the public	
Financial burden of regulation to the licensee	
Financial burden of regulation to the public	
Evaluation of radiological risk	
Benefit of the use of material to society	
Other considerations (describe any other considerations):	

APPENDIX A

Section 4 - Information About Yourself

The following information is optional, but your response would be helpful to the survey:

- 15. My information regarding safe operations with radioactive materials is based on:
 - \Box performing operations with radioactive materials _____ years
 - □ R&D/laboratory use
 - □ industrial use (gauges, radiography, etc.)
 - \Box medical use
 - □ manufacturing
 - \Box reactor (power or non-power)
 - \Box Other (please specify):

 \Box performing radiation safety oversight of operations by others _____ years

- □ R&D/laboratory use
- □ industrial use (gauges, radiography, etc.)
- \Box medical use
- □ manufacturing
- \Box reactor (power or non-power)
- \Box Other (please specify):

performing licensing of radioactive materials	 years
performing inspection of radioactive materials	 years
performing other regulatory review of radioactive materials use	 years
formal education in health physics or radiation science Degree: BA/BS MA/MS	 Ph.D.

□ work-related training courses

APPENDIX A

 \Box Other (please specify):

Appendix B

Correspondence Related to the Questionnaire

Correspondence Related to the Questionnaire

Correspondence related to the Questionnaire appears on the following pages.



STATE OF TENNESSEE DEPARTMENT OF ENVIRONMENT AND CONSERVATION Division of Radiological Health 3rd Floor, L & C Annex 401 Church Street Nashville, TN 37243-1532 615-532-0360 INTERNET: mmobley@mail.state.tn.us

August 14, 1998

U.S. Nuclear Regulatory Commission ATTN: Dennis I. Serig Mail Stop T8F5 Washington, D.C. 20555-0001

Dear Mr. Serig:

The survey contained in transmittal SP-98-065 was provided to members of our staff having experience in licensing and inspections. It is our feeling that a response to this survey will require a period of time significantly longer than the 1.5 to 3 hours of your estimation- by each respondent. Given the response time requested, sufficient time to formulate the response was not available.

Among our concerns regarding any response to this is the necessity for each respondent to create individual definitions to terms such as "very safe, somewhat safe...etc". How will the different definitions which will result be reconciled with one another? Also, it is almost certain that any response by each individual would be more appropriate, and considerably different, if given an opportunity for file review. There, again, time investment would be considerable.

We must regretfully defer response to your survey at the present time. Hopefully, some of these issues can be resolved and another opportunity to participate provided.

Sincerely.


Michael Alley

Michael H. Mobley Director

APPENDIX B

UCD LSFUDJ RLB2 STATE OF NEW YORK PHL **DEPARTMENT OF LABOR** SCD DIVISION OF SAFETY AND HEALTH ROV Radiological Health Unit J. Levig , NMSS J. Subinski Building #12, Room 134-A State Office Building Campus Albany, NY 12240 August 24, 1998 Mr. Paul Lohaus **Deputy Director** Office of State Programs United States Nuclear Regulatory Commission Washington, D.C. 20555 ۰. Dear Mr. Lohaus: I have completed the survey referred to in your letter SP-98-065 and returned it to Dennis Serig. However, this survey instrument was seriously flawed and I do not see how the responses received could be used as indicated in your letter to capture the "corporate knowledge" of regulatory personnel. It is unclear what pieces of the data gathered through this survey will be treated as factual and what will be treated as opinion. Since participants were instructed not to review files or other sources, and not to consult with other staff, it would appear that all of the responses should be regarded as anecdotal. It is also apparent that responses should not be regarded as the professional opinions of the respondents, since they are responses to carefully framed questions with a limited choice of answers. I would be very interested in knowing how the survey responses will be used to "augment and confirm information provided by Scientech." What information has Scientech provided and 0 MUG 26 MM 11: 42 how will responses to this survey augment or confirm them? Sincerely Rita Aldrich Principal Radiophysicist RA:jmp FAX: 518-485-7406 Telephone: 518-457-1202 P_1-4

	5.doc		Page
Augu	st 25, 19	998	
TO:		R. Bangart	
FROM	И:	A. Godwin	
SUBJ	ECT:	Bias in the questionnaire (SP-98-065)	
I offer	the foll	lowing as comments indicating a possible biasing in the subject document.	
apj this cor que the up cor	pears to s mean, rect this estioner respond the respondition a	xt of the document is to better establish risk based regulations. The document be poorly phrased. For example, question 4, does not clarify "off-normal." Does slightly delaying surveys or totally not doing surveys. The document attempts to s by letting the writer define "safeetc." Even with the writer's definitions, the cannot know what type of accident or "off-normal" condition was envisioned by der. Without that knowledge, the reviewer has to assume the conditions to match bonses. Thus if one responder is envisioning an "off-normal" nuclear pharmacy as a failure to survey the sink one night. While the reviewer may be thinking of a d contaminated shipment being made off-site.	
resp mer sho fluc to b	ponding reglance w that o proscopio re less th	e is question 6. The responses to this are pure speculation, since most regulators is do not have any experience of how things would operate without regulations. A e at the conditions exiting in x-ray departments prior to state regulation would one cannot adequately envision the possible problems. For example, we found ic units with an output of > 30 R/min. twenty years after the recommendation was nan 10 R/min. Because the regulations have existed, we do not have a concept of tions may occur if they did not exist.	
3. Que arou	estions 8 and a 10	8.1 and 8.2 play against each other. Inherent safety features are very important 00 Ci cobalt 60 fixed gauge, yet not very important with a 30 microcurie one.	
4. Sim	ilarly, 8	8.1 verses 8.4, the quantity being considered radically changes the response.	
5. Que resp	estions 9 onder ir	0.1, 9.2, 9.4, 10.1, 10.2, 10.4, 11.1, 11.2, and 11.4 are somewhat better in that the ndicates what quantity to which they are responding.	
reviewe	ers. Sinc	uples of what I felt were questions that could lead to some false conclusions be the ce they were a significant portion of the total questionnaire, I would be concerned ity of the conclusions reached.	

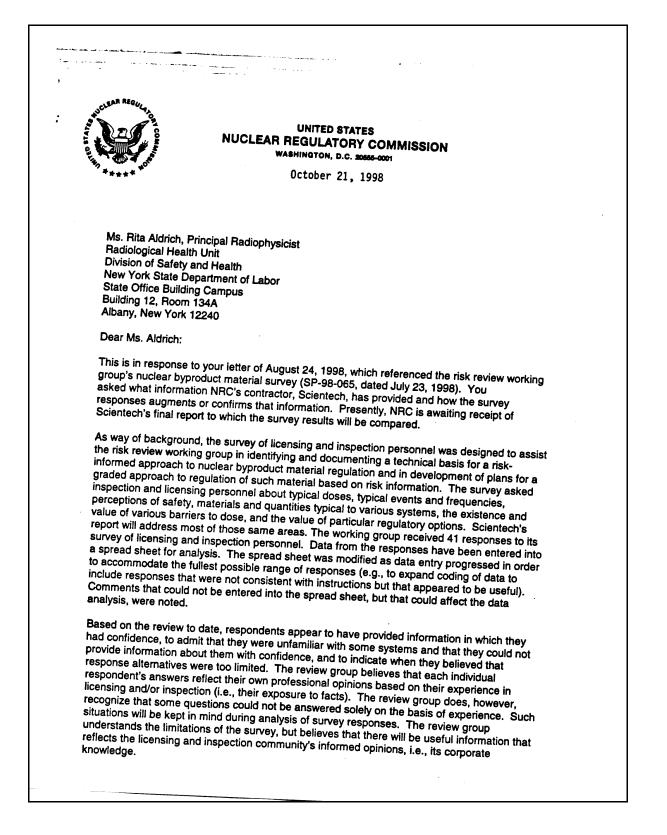

OCT 2 1 1998 -2-**Rita Aldrich** The survey is intended as only one of several sources of information used to satisfy the working group's charter. Results will be compared with contractor information about doses, events and frequencies, materials and quantities. Perhaps more importantly, the informed opinions of licensing and inspection personnel about the existence and effectiveness of barriers to dose and the value of particular regulatory options will be compared with contractor developed views on those same subjects. Should you have additional comments or questions, please feel free to contact Dennis Serig at 301-415-7901 or via e-mail at dis@nrc.gov. Sincerely Paul H. Lohaus, Deputy Director Office of State Programs B7

APPENDIX B

Appendix C Responses to Comments on Draft NUREG-1712

APPENDIX C

Introduction

NUREG-1712, "Results of Survey of NRC and Agreement State Materials Licensing and Inspection Personnel," was published for public comment on August 25, 1999 (64 FR 46456). In response to the request for comments, NRC received 4 comments, 3 from Agreement States, and 1 from a private company. All comments are available for review in the NRC Public Document Room.

Comment: One commenter stated that much of the content is based on terminology or definitions that are very different from one participant to the next. This makes the specific results nebulous at best. The one thing of value is the table that "ranks the various systems. The commenter stated that the State will expend resources based more on state-specific or site specific criteria rather than a table reflecting an averaging of "best guesses," even if they are from experienced regulators.

Response: The survey was intended to gather information from NRC and Agreement State materials licensing and inspection personnel concerning typical annual doses to workers for the various systems, safety of each system under various conditions, the types and frequencies of incidents occurring at each system, definitions of safety, and opinions about the appropriate bases for regulatory decision making. The NRC did not intend for the States to use the results in making decisions related to their programs. The staff reviewed the results in line with results of the nuclear byproduct material risk study, NUREG/CR-6642, "Risk Analysis and Evaluation of Regulatory Options for Nuclear Byproduct Material Systems," for comparison purposes. The staff recognizes the limitations of the survey, but believes that there is useful information that reflects informed opinions.

Comment: The survey provides a good subjective summary of the most knowledgeable professionals' views as to the safety and the impact of NRC licensed activities. However, since safety was not predefined and allowed to reflect each respondents personal definition, the four categories of safety were arbitrary and of questionable value.

Response: Again, the survey was intended to gather information on nuclear byproduct material systems obtained from other sources, specifically NRC and Agreement State materials licensing and inspection personnel. The survey was not intended to be an absolute scientific survey, but more a gathering of information from knowledgeable personnel. The results were also compared to the results of NUREG/CR-6642, but were not used in the preparation of the NUREG.

Comment: A commenter from a private company providing nuclear laundry services provided additional information regarding the percentage of doses in 2 different dose categories.

Response: Only regulatory personnel were included in this survey, and actual data from licensees was not solicited in the survey process. Although activities involving the use of byproduct material at nuclear laundries were not included in the original survey, one survey respondent noted nuclear laundries as an activity which should be considered separately, and

APPENDIX C

applied the survey questions to this activity. The information regarding nuclear laundries in this survey is based only on the information provided by that individual. The staff appreciates the effort of the private company to provide data from their activities as a nuclear laundry.

Comment: The survey results compiled in NUREG-1712 are subjective and anecdotal <u>opinions</u> of survey respondents. The survey was poor designed, encouraged subjective opinion, and lacked definitions and explanations. The so-called "data" in NUREG-1712 cannot be viewed as objective, precise, or accurate.

Response: Again, the survey was not intended to be a "hard" scientific survey. It was intended to gather information, which staff recognized would be subjective and based on opinion. The results of the survey were not used in NUREG/CR-6642.